RNAV (RNP) Z RWY 4R

JOHN F. KENNEDY INTL (JFK)

APP CRS	Rwy Idg	8400
045°	TDZE	13
	Apt Elev	13

GPS required. For uncompensated Baro-VNAV systems, procedure NA below -13°C (9°F) or above 48°C (118°F). For inoperative ALSF-2, increase NA RNP 0.30 DA all Cats visibility to 1½. Simultaneous approach authorized with Rwy 4L. Use of FD or AP providing track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 4000 via 045° track to PIYIY and via 091° track to DPK VOR/DME and hold.

ATIS			NEW YORK APP CON		KENNEDY TOWER			GND CON	CLNC DEL
	(ARR-NE)	(ARR-SW)							
128.725	117.7	115.4	128.12	269.0	Rwys 4R/22L and 13L/31R	119.1	281.55	121.9	135.05
					Rwys 4L/22R and 13R/31L	123.9	281.55	348.6	348.6

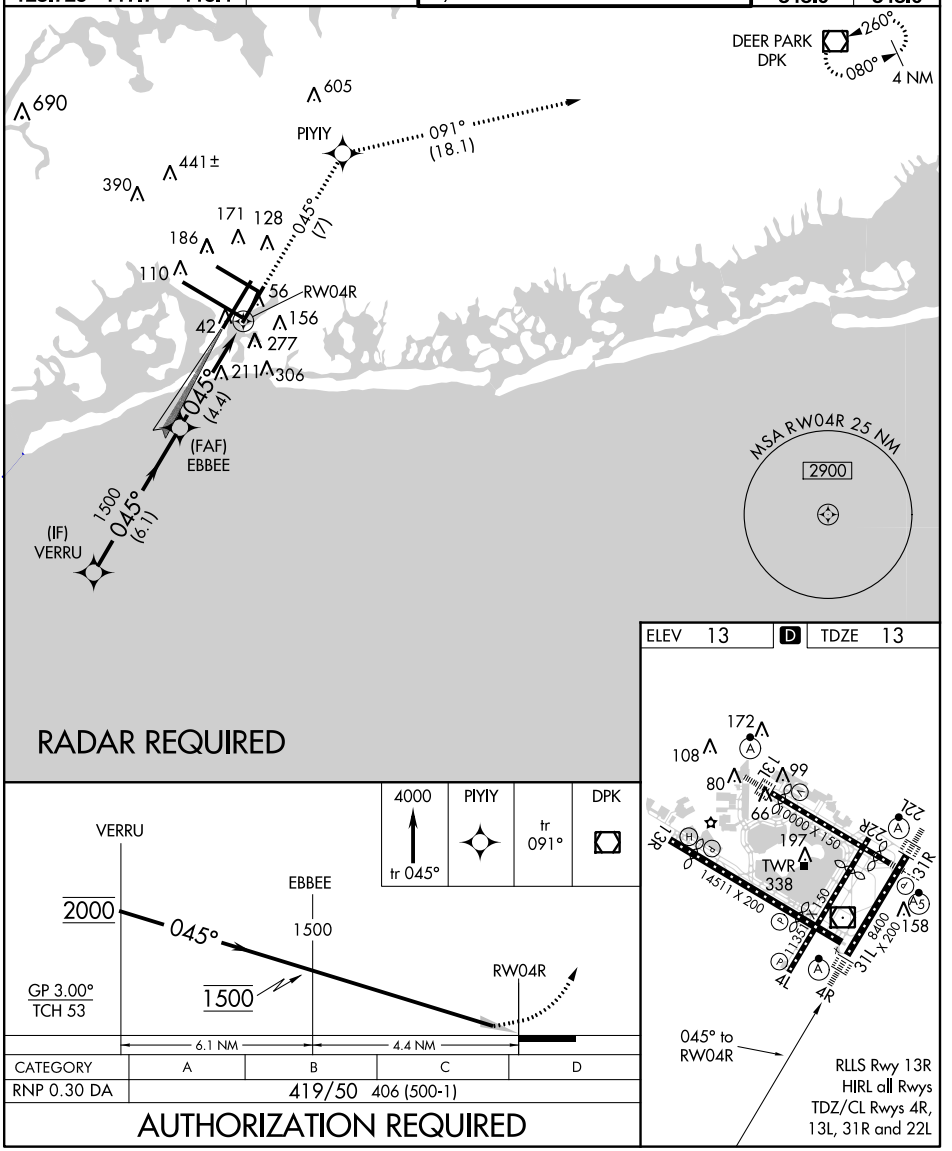

CATEGORY	A	B	C	D
RNP 0.30 DA	419/50	406 (500-1)		

AUTHORIZATION REQUIRED

NE-2, 26 JUN 2014 to 24 JUL 2014

NE-2, 26 JUN 2014 to 24 JUL 2014