

WAAS CH 97318 W22A	APP CRS 225°	Rwy ldg TDZE 13 Apt Elev 13	8400
----------------------------------------	------------------------	-------------------------------------------------	-------------

RNAV (GPS) Y RWY 22L


JOHN F. KENNEDY INTL (JFK)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C (8°F) or above 49°C (120°F), DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 22R. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.



MISSED APPROACH: Climb to 3000 direct FOLER and via 189° track to CHANT and hold.


ATIS (ARR-NE) (ARR-SW) 128.725 117.7 115.4	NEW YORK APP CON 128.12 269.0	KENNEDY TOWER Rwys 4R/22L and 13L/31R 119.1 281.55 Rwys 4L/22R and 13R/31L 123.9 281.55	GND CON 121.9 348.6	CLNC DEL 135.05 348.6
---------------------------------------------------------	-----------------------------------------	-------------------------------------------------------------------------------------------------------------	-------------------------------	---------------------------------

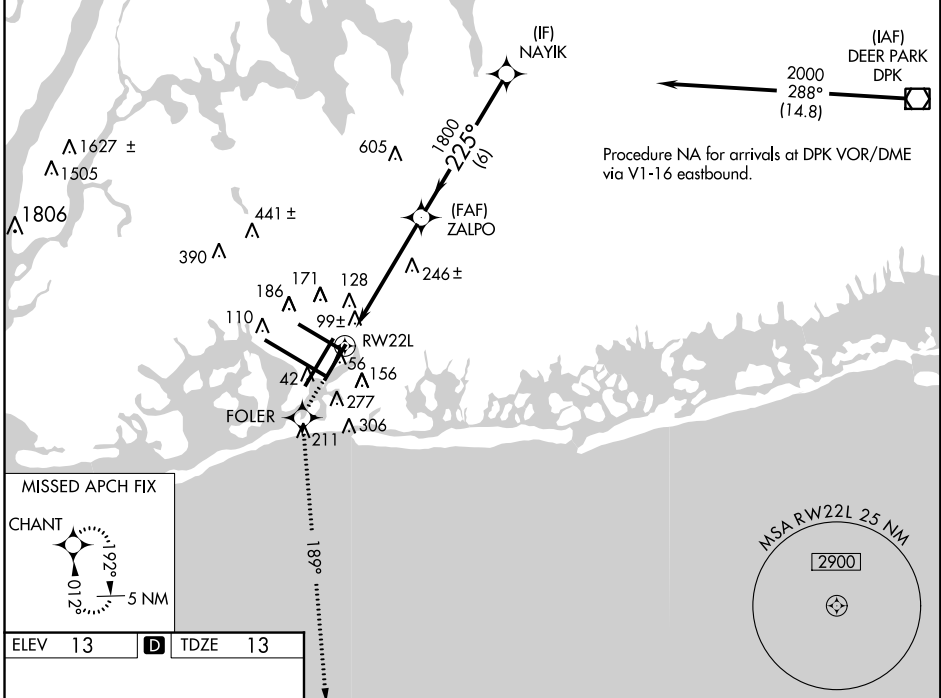


NE-2, 26 JUN 2014 to 24 JUL 2014

NE-2, 26 JUN 2014 to 24 JUL 2014

ELEV 13	D	TDZE 13
---------	----------	---------

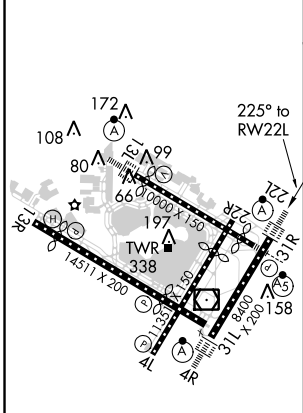

RLLS Rwy 13R
HIRL all Rwys
TDZ/CL Rwys 4R, 13L, 31R and 22L

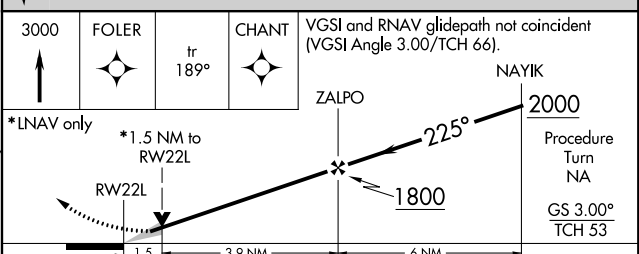

CATEGORY	A	B	C	D
LPV DA	270/24		257 (300-½)	
LNAV/VNAV DA	420/50		407 (500-1)	
LNAV MDA	560/24	547 (600-½)	560/50 547 (600-1)	560/60 547 (600-1¼)
CIRCLING	640-1	627 (700-1)	640-1¾ 627 (700-1¾)	640-2 627 (700-2)