RNAV (GPS) Y RWY 4R

JOHN F. KENNEDY INTL (JFK)

WAAS	APP CRS	Rwy Idg	8400
CH 81819	045°	TDZE	13
W04B		Apt Elev	14

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with Rwy 4L. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 4000 direct FEXAK and right turn on track 083° to DPK VOR/DME and hold.

ATIS			NEW YORK APP CON	KENNEDY TOWER		GND CON	CLNC DEL
	(ARR-NE)	(ARR-SW)					
128.725	117.7	115.4	128.12 269.0	Rwys 4R/22L and 13L/31R	119.1 281.55	121.9 348.6	135.05 348.6
				Rwys 4L/22R and 13R/31L	123.9 281.55		

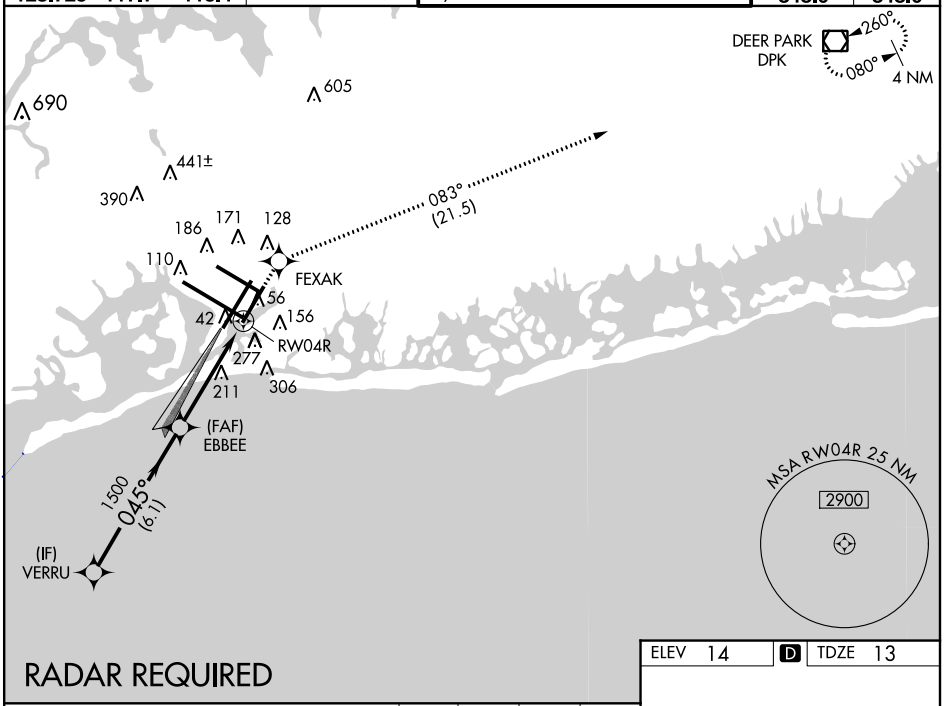

RADAR REQUIRED

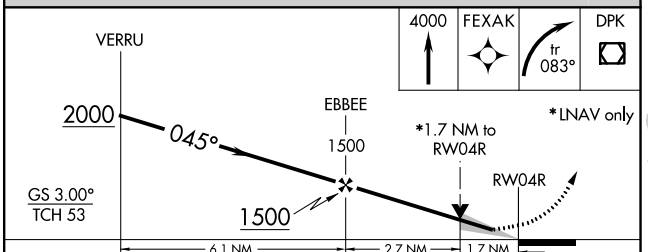

CATEGORY	A	B	C	D
LPV DA	270/24 257 (300-½)			
LNAV/VNAV DA	520/60 507 (600-1¼)			
LNAV MDA	600/24 587 (600-½)		600/50 587 (600-1)	600/60 587 (600-1¼)
CIRCLING	640-1 626 (700-1)		640-1¾ 626 (700-1¾)	640-2 626 (700-2)

ELEV 14 D TDZE 13

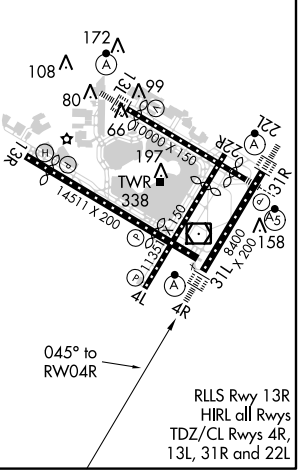

NE-2, 26 JUN 2014 to 24 JUL 2014

NE-2, 26 JUN 2014 to 24 JUL 2014