

RNAV (GPS) RWY 24R

WAAS CH 61450 W24B	APCH CRS 243°	Rwy Idg 12,000 TDZE 475 Arpt Elev 477
--------------------------	------------------	---

AL-903 [UN]

MIRAMAR MCAS (JOE FOSS FLD) (KNKX)

DME/DME RNP-0.3 NA.

▼ ** When ALS inop, increase CAT ABCD vis to 3/4 mile.
 *** When ALS inop, increase CAT AB vis to 1 mile, CAT CD vis to 2 miles.




MISSED APPROACH: Climb to 3000 direct HOTIG, 288° track to REDIN and hold.



ATIS ★ 352.0 133.475	SOCAL APP CON 132.2 269.1	FOSS TOWER ★ 135.2 298.925	GND CON 128.625 307.325	CLNC DEL 125.975 254.325	LA CENTER 291.7	ASR/ PAR
----------------------------	---------------------------------	----------------------------------	-------------------------------	--------------------------------	--------------------	-------------

For uncompensated Baro-VNAV systems, procedure NA below -15°C (5°F) or above 54°C (130°F).

CAUTION: Intermediate deceleration segment descent gradient 309 FPM is greater than 150 FPM.

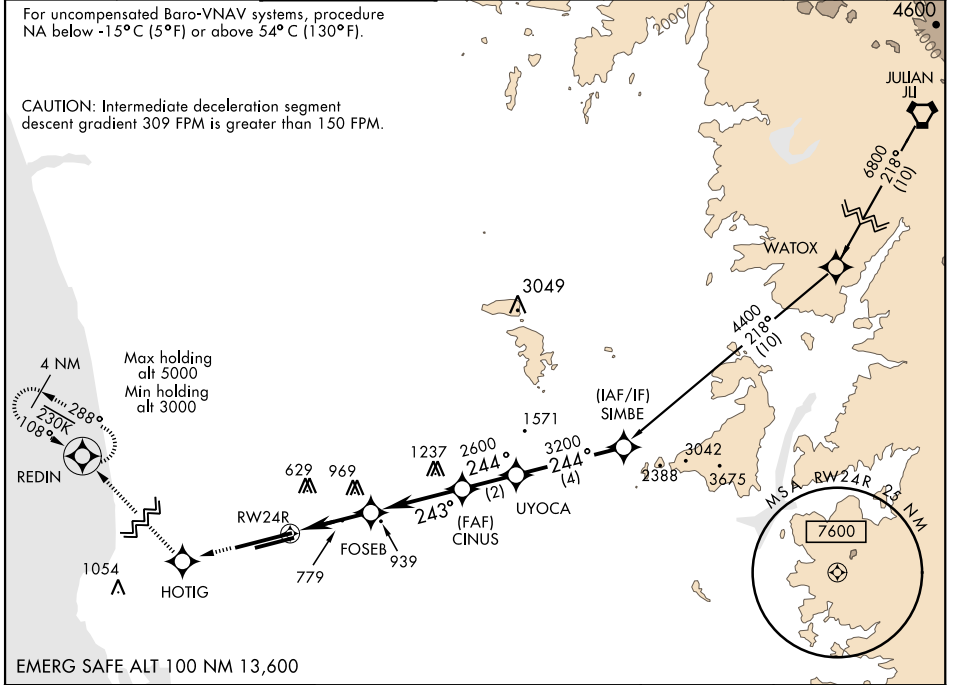

EMERG SAFE ALT 100 NM 13,600

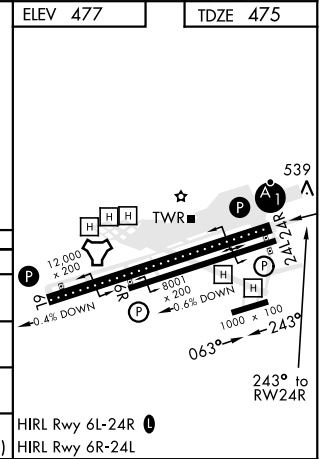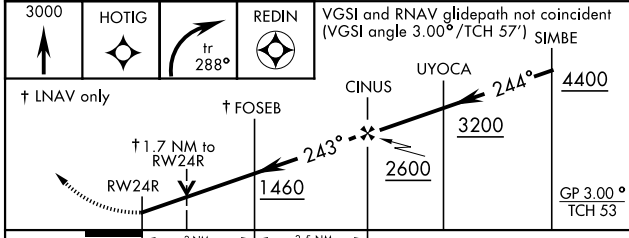

CATEGORY	A	B	C	D
LPV DA *		675-1/2	200	(200-1/2)
LNAV/VNAV DA **		725-1/2	250	(300-1/2)
LNAV MDA ***	1080-1/2	605 (700-1/2)	1080-1 1/8	605 (700-1 1/8)
CIRCLING	1080-1	603 (700-1)	1080-1 3/4	703 (800-2 1/4)

HIRL Rwy 6L-24R
HIRL Rwy 6R-24L

RNAV (GPS) RWY 24R

SW-3, 25 FEB 2021 to 25 MAR 2021

SW-3, 25 FEB 2021 to 25 MAR 2021