RNAV (RNP) Z RWY 10L

PORTLAND INTL (PDX)

APP CRS	Rwy Idg	8535
103°	TDZE	30
	Apt Elev	31

GPS required. For inop MALSR, increase RNP 0.30 all Cats visibility to RVR 5500. For uncompensated Baro-VNAV systems, procedure NA below -6°C (22°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 10R, except for arrivals at CIZZL, VOODU, and MYCRO. Use of FD or AP providing RNAV track guidance required for simultaneous operations.

MALSR

MISSED APPROACH: Climb to 800 then climbing left turn to 4400 direct BATYL and hold, continue climb-in-hold to 4400.

ATIS	PORTLAND APP CON	PORTLAND TOWER		GND CON	CLNC DEL
		Rwy 10L-28R	Rwys 3-21, 10R-28L		
128.35 269.9	124.35 299.2	118.7 257.8	123.775 251.125	121.9 348.6	120.125 318.1

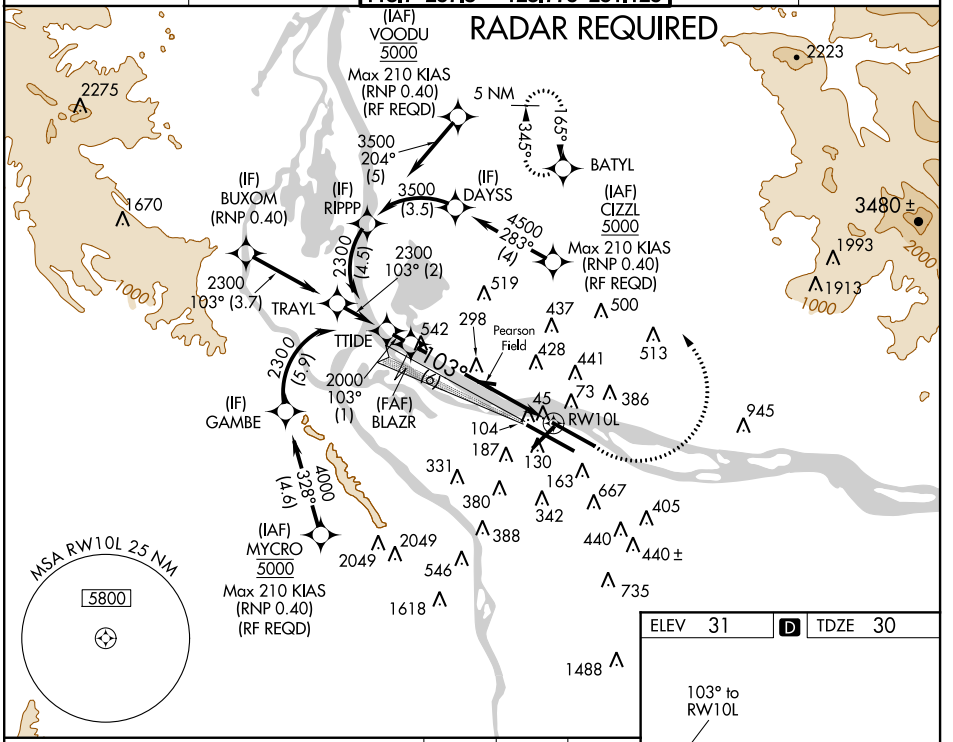

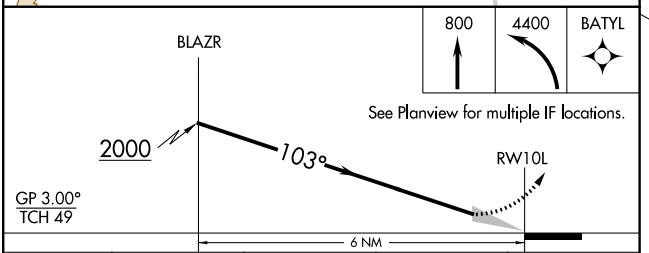

CATEGORY	A	B	C	D
RNP 0.30 DA	365/32 335 (400-⅝)			

AUTHORIZATION REQUIRED

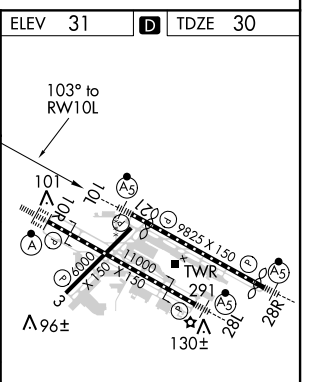

REIL Rwys 3 and 21
TDZ/CL Rwy 10R
MIRL Rwy 3-21
HIRL Rwys 10L-28R and 10R-28L

NW-1, 26 JUN 2014 to 24 JUL 2014
NW-1, 26 JUN 2014 to 24 JUL 2014