RNAV (GPS) RWY 27

ANOKA COUNTY-BLAINE (JANES FIELD) (ANE)

WAAS CH 78300 W27A	APP CRS 269°	Rwy Idg 5000 TDZE 910 Apt Elev 912

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 2700 direct OCIBA and track 268° to GEP VORTAC and hold.

ATIS	MINNEAPOLIS APP CON	ANOKA TOWER*	GND CON	CLNC DEL	MINNEAPOLIS CLNC DEL	UNICOM
120.625	126.5 335.65	132.4 (CTAF) L	121.85	121.3	121.85 (When tower closed)	122.95

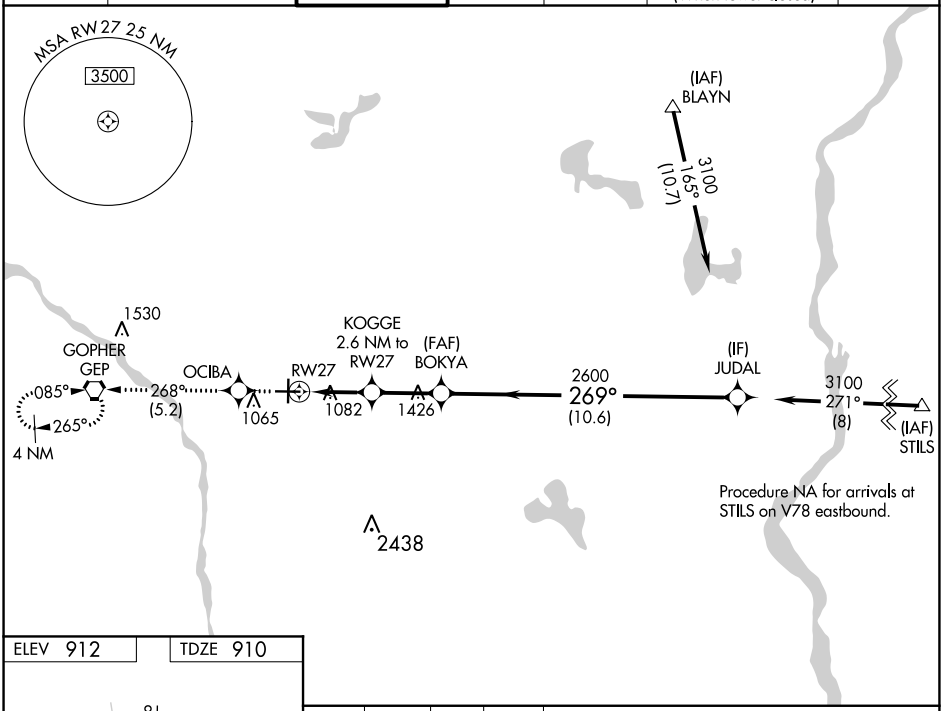

ELEV 912	TDZE 910

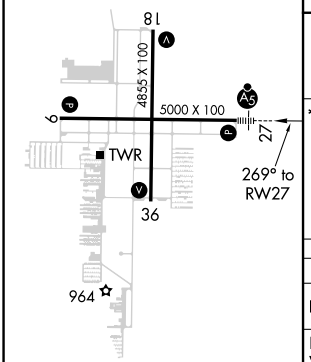

HIRL Rwy 9-27 L
MIRL Rwy 18-36 L
REIL Rwys 9, 18, and 36 L

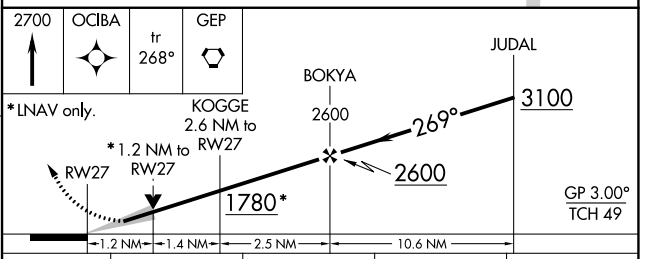

CATEGORY	A	B	C	D
LPV DA	1160-½ 250 (300-½)			
LNAV/VNAV DA	1371-1 461 (500-1)			
LNAV MDA	1340-½ 430 (500-½)		1340-¾ 430 (500-¾)	1340-1 430 (500-1)
C CIRCLING	1400-1 488 (500-1)		1460-1½ 548 (600-1½)	1580-2 668 (700-2)

NC-1, 25 FEB 2021 to 25 MAR 2021
NC-1, 25 FEB 2021 to 25 MAR 2021