RNAV (GPS) RWY 1

ALPENA COUNTY RGNL (APN)

WAAS CH 50310 W01A	APP CRS 007°	Rwy Idg 9001 / TDZE 685 / Apt Elev 690

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 48°C. When local altimeter setting not received, use Rogers City altimeter setting; increase all LPV DAs to 1029 feet, LNAV/VNAV DAs to 1084 feet and all MDAs 60 feet; increase LPV all Cats, LNAV/VNAV all Cats and LNAV Cats C and D visibility ¼ SM. Baro-VNAV and VDP NA when using Roger City altimeter setting. For inop ALS, increase LPV all Cats visibility to 1 SM.

-32°C

MALSR

MISSED APPROACH: Climb to 3500 direct HIMVO and on track 307° to RABBO and hold.

ASOS	ALPENA APP CON ★	ALPENA TOWER ★	GND CON	UNICOM
120.675	128.425 379.3	121.35 (CTAF) L 318.1	121.9 275.8	122.95

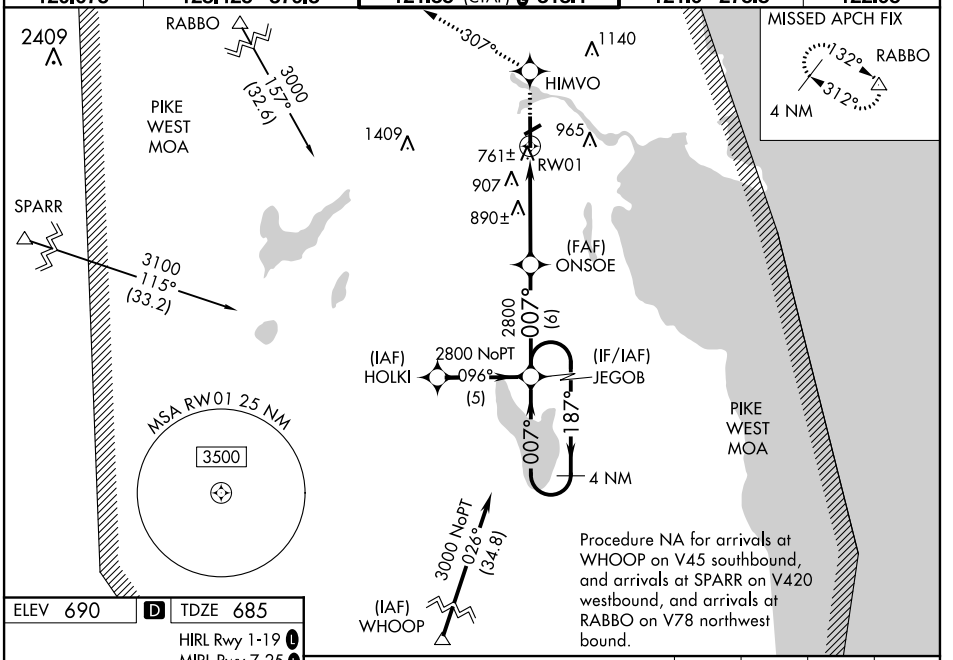

ELEV 690 D TDZE 685

HIRL Rwy 1-19 L
MIRL Rwy 7-25 L
REIL Rwys 7, 19 and 25 L

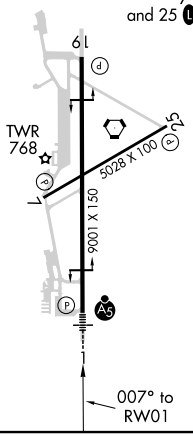

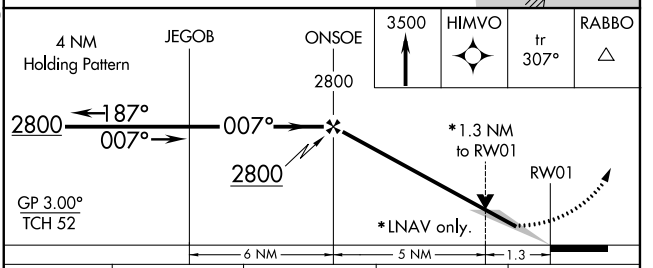

3500	HIMVO	tr 307°	RABBO

CATEGORY	A	B	C	D
LPV DA	974-½ 289 (300-½)			
LNAV/VNAV DA	1029-¾ 344 (400-¾)			
LNAV MDA	1160-½ 475 (500-½)		1160-¾ 475 (500-¾)	1160-1 475 (500-1)
C CIRCLING	1160-1 470 (500-1)		1220-1½ 530 (600-1½)	1280-2 590 (600-2)

EC-1, 25 FEB 2021 to 25 MAR 2021
EC-1, 25 FEB 2021 to 25 MAR 2021