ILS or LOC RWY 10

HARTSFIELD-JACKSON ATLANTA INTL (ATL)

LOC/DME I-OMO	APP CRS	Rwy ldg	9000
111.55	095°	TDZE	1000
Chan 52 (Y)		Apt Elev	1026

For inop ALSF-2, increase S-LOC Cats C/D visibility to 1⅜.
Simultaneous approach authorized with Rwy 9L or 8R or 8L, or Rwys 9L and 8L.
DME or Radar required.
Localizer not suitable for electronic rollout guidance.

ALSF-2

MISSED APPROACH: Climb to 1400 then climbing right turn to 3000 on ATL VORTAC R-185 to SCARR INT/ATL 15 DME and hold.

D-ATIS	ATLANTA	ATLANTA TOWER					ALL	GND CON				ALL
		8L-26R	8R-26L	9L-27R	9R-27L	10-28	RWYS	(8L-26R,8R-26L)	(9L-27R,9R-27L)	10-28		RWYS
ARR 119.65	APP CON	119.1	125.325	123.85	119.3	119.5	254.4	121.9	121.75	121.65		254.4
DEP 125.55	127.9 379.9											

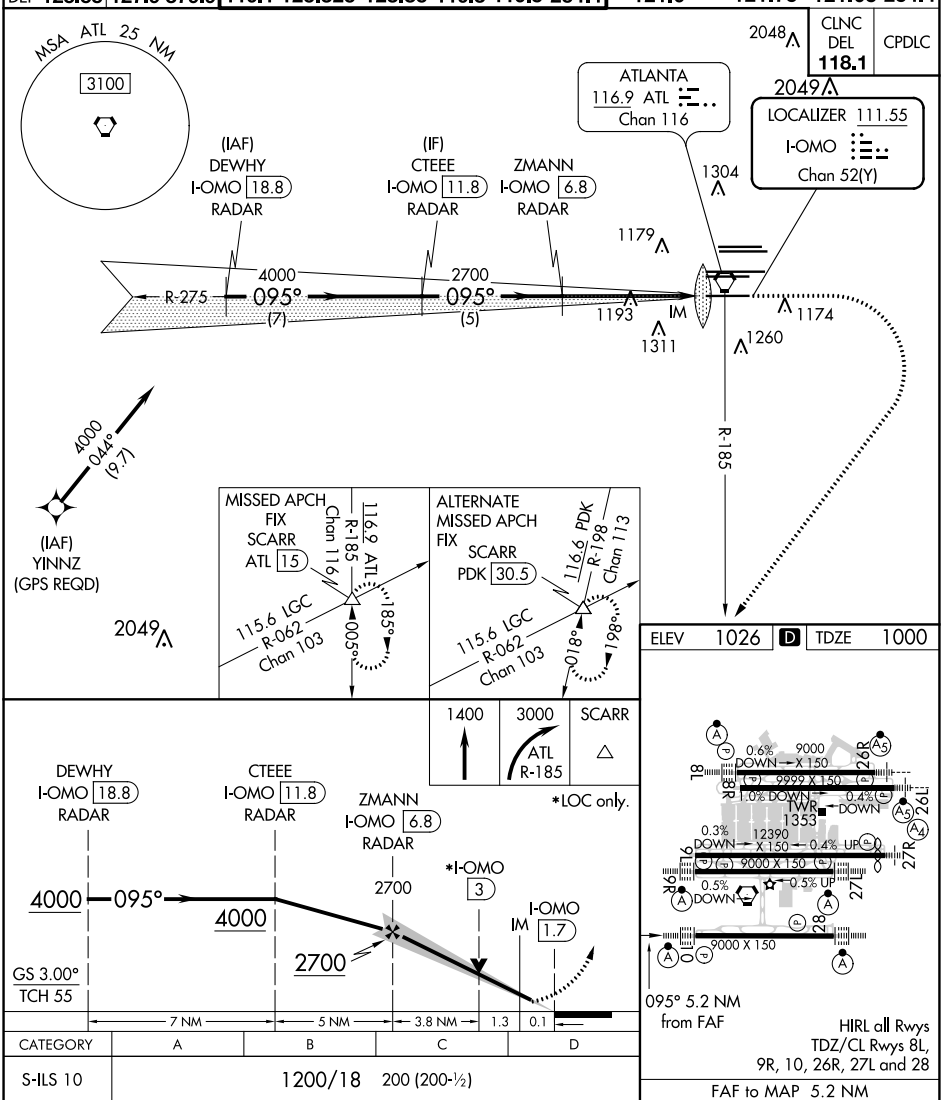

HIRL all Rwys
TDZ/CL Rwys 8L, 9R, 10, 26R, 27L and 28

CATEGORY	A	B	C	D
S-ILS 10	1200/18 200 (200-½)			
S-LOC 10	1500/24 500 (500-½)		1500/50 500 (500-1)	

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

SE-4, 25 FEB 2021 to 25 MAR 2021
SE-4, 25 FEB 2021 to 25 MAR 2021