


RNAV (GPS) PRM RWY 27R (SIMULTANEOUS CLOSE PARALLEL) HARTSFIELD-JACKSON ATLANTA INTL (ATL)

WAAS CH 70400 W 27B	APP CRS 275°	Rwy Idg 11690 TDZE 985 Apt Elev 1026
---	------------------------	---

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous close parallel approach authorized with ILS PRM and RNAV PRM Rwy 26R or 26L or 28, or Rwys 26R and 28, or Rwys 26L and 28. Dual VHF Comm required. Use of FD or AP providing RNAV track guidance required during simultaneous operations. See additional requirements on AAUP. For inop MALS, increase LNAV/VNAV Cat D visibility to 1½ miles. Inop table does not apply to LPV, all Cats.

MALS 	MISSED APPROACH: Climb to 4000 direct ROTLE and on track 272° to TEMPO and hold.
----------	--

D-ATIS ARR 119.65 DEP 125.55	ATLANTA APP CON 127.9 379.9	ATLANTA TOWER 8L-26R 119.1 8R-26L 125.325 9L-27R 123.85 9R-27L 119.3 10-28 RWYS 119.3 ALL RWYS 254.4 PRM 132.55	GND CON 8L-26R,8R-26L 121.9 9L-27R,9R-27L 121.75 10-28 RWYS 121.65 ALL RWYS 254.4
--	---------------------------------------	--	--

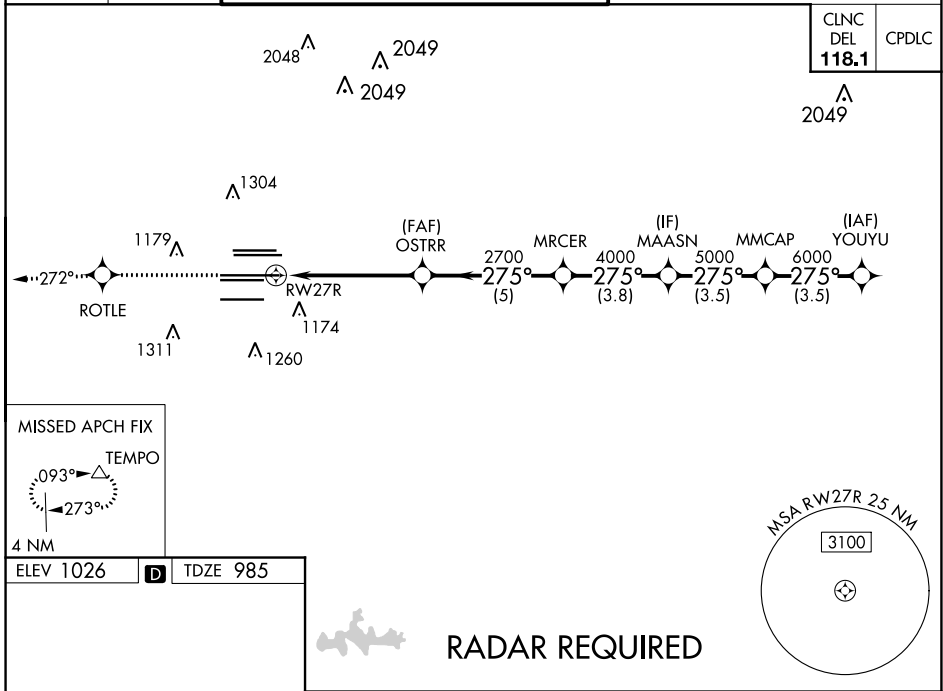

MISSED APCH FIX TEMPO 093° 273° 4 NM	ELEV 1026	D	TDZE 985
HIRL all Rwys TDZ/CL Rwys 8L, 9R, 10, 26R, 27L and 28			

4000	ROTLER 	TEMPO tr 272°	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 72).	
YOUYU 7000	MMCAP 6000	MAASN 5000	OSTRR 2700	RWY 27R 2700
GP 3.00° TCH 56				
5.2 NM 5 NM 3.8 NM 3.5 NM 3.5 NM				
CATEGORY	A	B	C	D
LPV DA		1185/40	200 (200-¾)	
LNAV/VNAV DA		1461-1¾	476 (500-1¾)	

SE-4, 25 FEB 2021 to 25 MAR 2021

SE-4, 25 FEB 2021 to 25 MAR 2021

RNAV (GPS) PRM RWY 27R (SIMULTANEOUS CLOSE PARALLEL)