APP CRS	Rwy Idg	12250
355°	TDZE	496
	Apt Elev	542

RNAV (RNP) Z RWY 35L

AUSTIN-BERGSTROM INTL (AUS)

For uncompensated Baro-VNAV systems, procedure NA below -6°C (22°F) or above 54°C (130°F). Simultaneous approach authorized. GPS required. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to 1½ SM.

MALSR (A5)

MISSED APPROACH: Climb to 1700 then climbing left turn to 3500 direct GARDS and hold.

D-ATIS	AUSTIN APP CON	AUSTIN TOWER	GND CON	CLNC DEL	CPDLC
124.4	127.225 317.65 (EAST) 120.875 270.25 (SOUTH) 119.0 370.85 (WEST)	121.0 281.5	121.9 348.6	125.5 263.0	

RADAR REQUIRED

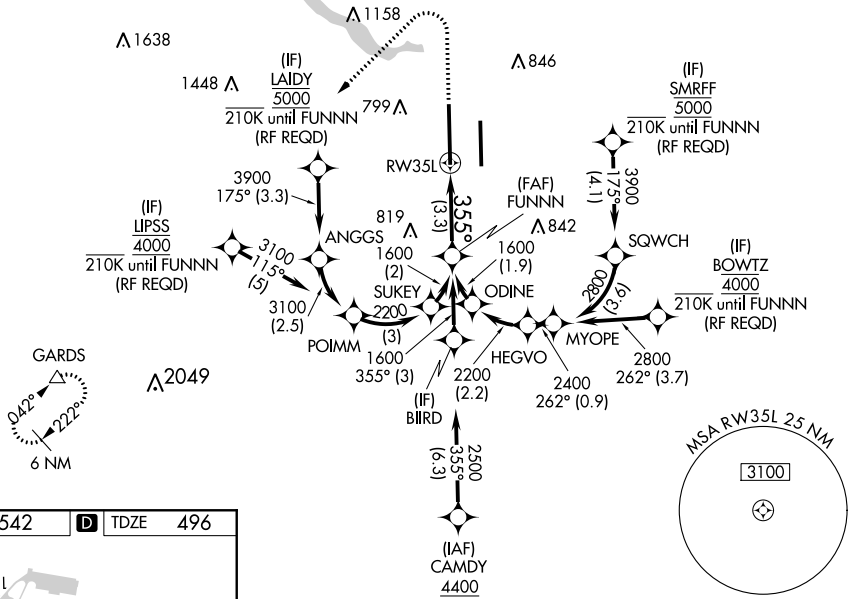

ELEV 542	D	TDZE 496

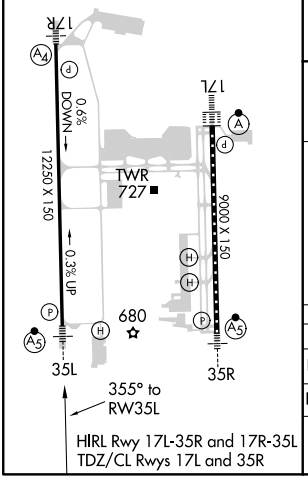

1700	3500	GARDS

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 60).

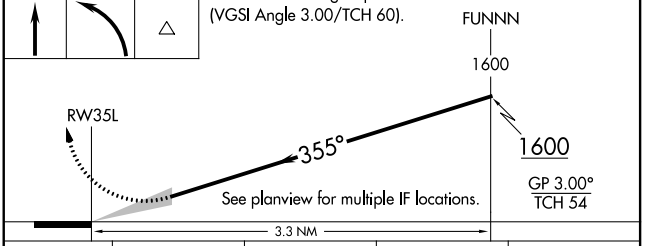

CATEGORY	A	B	C	D
RNP 0.11 DA	765/24 269 (300-½)			
RNP 0.30 DA	952/60 456 (500-1¼)			

AUTHORIZATION REQUIRED

SC-3, 25 FEB 2021 to 25 MAR 2021
SC-3, 25 FEB 2021 to 25 MAR 2021