

WAAS CH 61337 W36A	APP CRS 356°	Rwy Idg TDZE 1471 Apt Elev 1477	5001 1471 1477
--	------------------------	---	---

RNAV (GPS) RWY 36

ALVA RGNL (AVK)



▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Vance AFB altimeter setting and increase all DA 127 feet and all MDA 140 feet; increase LPV all Cats, LNAV/VNAV all Cats and LNAV Cat C visibility ⅓ mile and Circling Cat C visibility ½ mile. Baro-VNAV and VDP NA when using Vance AFB altimeter setting.

MISSED APPROACH:
Climb to 3300 direct ZOKOF and hold.

AWOS-3 121.125	VANCE APP CON ★ 126.75 346.325	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

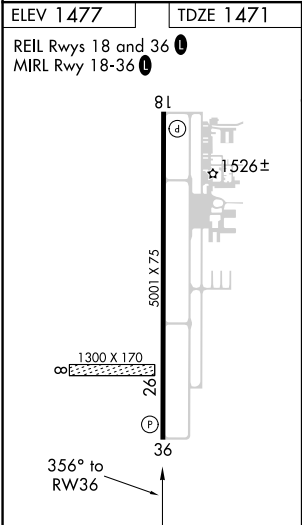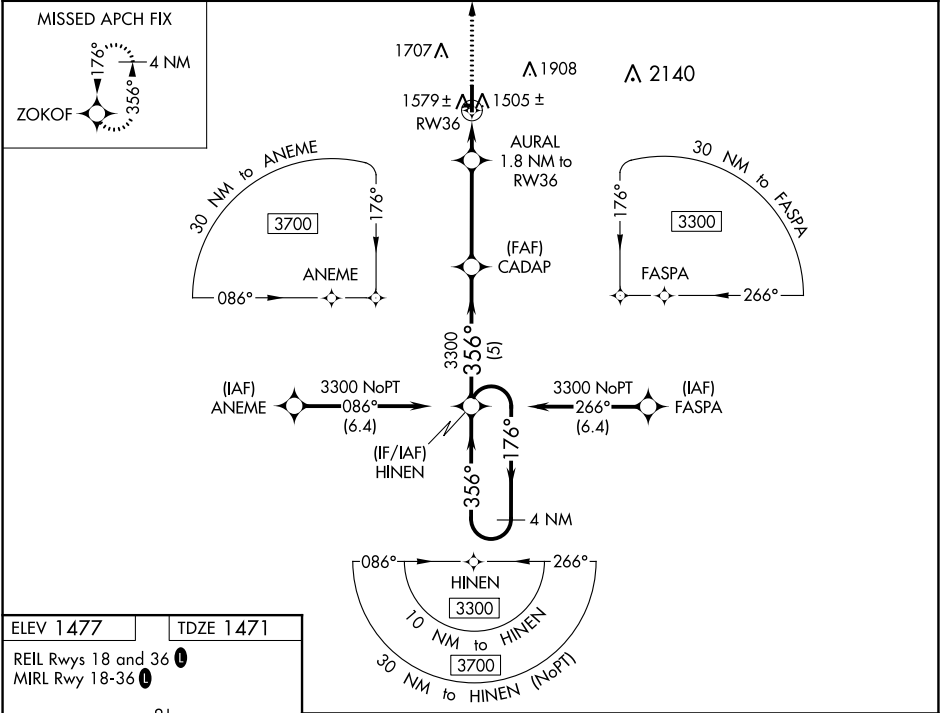

3300	ZOKOF	*LNAV only.	CADAP	HINEN	4 NM Holding Pattern
		AURAL 1.8 NM to RW36	3300		
		*1 NM to RW36	*2080	3300	GP 3.00° TCH 40
		1 NM	0.8	3.8 NM	5 NM
CATEGORY	A	B	C	D	
LPV DA	1721-7/8	250 (300-7/8)		NA	
LNAV/VNAV DA	1751-1	280 (300-1)		NA	
LNAV MDA	1840-1	369 (400-1)		NA	
CIRCLING	1980-1 503 (600-1)	2120-1 643 (700-1)	2220-2¼ 743 (800-2¼)	NA	