

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 69316 W17A | APP CRS 180° | Rwy Idg TDZE Apt Elev | 6003 213 213 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 17

WEST MEMPHIS MUNI (A W M)


RNP APCH.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). When local altimeter setting not received, use Memphis Intl altimeter and increase all DA 50 feet and all MDA 60 feet and increase LNAV/VNAV all Cats and LNAV Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Memphis Intl altimeter setting.

MALSR
AS

MISSED APPROACH:
Climb to 2100 direct USUPE and hold.

| | | | |
|------------------------|---------------------------------------|--------------------------|---|
| ASOS 118.175 | MEMPHIS APP CON 119.1 291.6 | CLNC DEL 121.7 | UNICOM 123.05 (CTAF) 0 |
|------------------------|---------------------------------------|--------------------------|---|

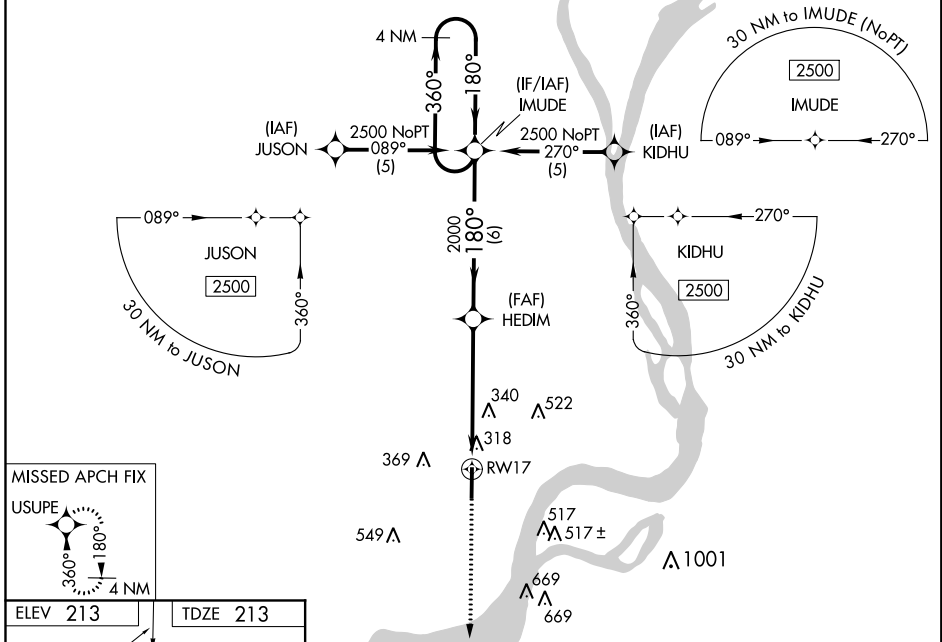


ELEV 213 | **TDZE 213**

180° to RWY 17

MIRL Rwy 17-35 **0**

REIL Rwy 35 **0**

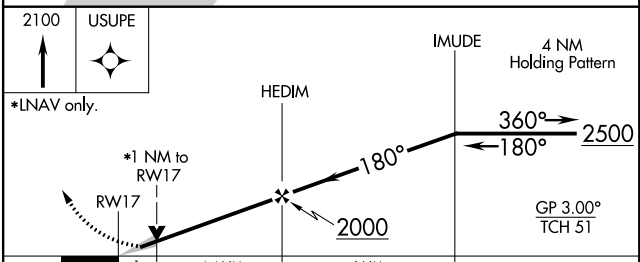

| CATEGORY | A | B | C | D |
|--------------|----------------------|----------------------|------------------------|----------------------|
| LPV DA | | 463-½ | 250 (300-½) | |
| LNAV/VNAV DA | | 594-¾ | 381 (400-¾) | |
| LNAV MDA | 600-½ | 387 (400-½) | 600-⅝ 387 (400-⅝) | 600-1 387 (400-1) |
| CIRCLING | 640-1 427 (500-1) | 680-1 467 (500-1) | 680-1½ 467 (500-1½) | 780-2 567 (600-2) |

SC-1, 25 FEB 2021 to 25 MAR 2021

SC-1, 25 FEB 2021 to 25 MAR 2021