


RNAV (RNP) Z RWY 15




CHARLESTON AFB/INTL (CHS)

APP CRS	Rwy Idg	9001
154°	TDZE	43
	Apt Elev	46

▼ For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). GPS required. For inop ALSF, increase RNP 0.11 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to RVR 6000.

ALSF-2  **MISSED APPROACH: Climb to 3000 on track 154° to SHRMP and hold.**

ATIS 124.75	CHARLESTON APP CON 120.7 306.925	CHARLESTON TOWER 126.0 239.0	GND CON 121.9 348.6	CLNC DEL 127.325 291.65	CPDLC
-----------------------	--------------------------------------------	----------------------------------------	-------------------------------	-----------------------------------	-------

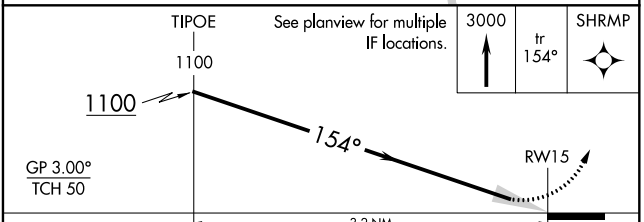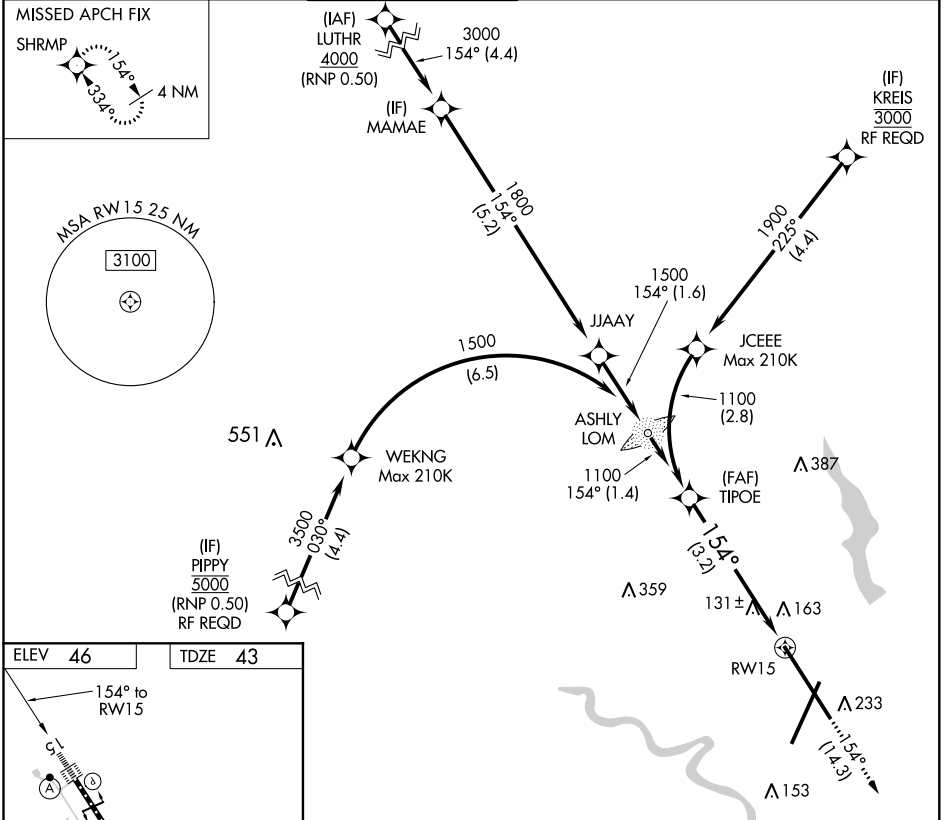

CATEGORY	A	B	C	D
RNP 0.11 DA		315/24	272 (300-½)	
RNP 0.30 DA		428/45	385 (400-¾)	

AUTHORIZATION REQUIRED

SE-2, 25 FEB 2021 to 25 MAR 2021

SE-2, 25 FEB 2021 to 25 MAR 2021