

# BOBZY FOUR DEPARTURE (RNAV)

AL-78 (FAA)

CHARLOTTE/DOUGLAS INTL (CLT)  
CHARLOTTE, NORTH CAROLINA

SE-2, 25 FEB 2021 to 25 MAR 2021

**TOP ALTITUDE:**  
8000

NOTE: For turbojets only.  
NOTE: DME/DME/IRU or GPS required.

NOTE: RNAV 1.

NOTE: RADAR required.

NOTE: If unable to accept climb rates, advise ATC on initial contact.

NOTE: Accelerate to 250K, if unable advise ATC. Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.



D-ATIS DEP 132.1  
CLNC DEL 127.15 348.6  
CPDIC  
GND CON  
121.8 348.6 (WEST)  
121.9 348.6 (EAST)  
CHARLOTTE TOWER  
118.1 257.8 (Rwys 18L-36R, 5-23)  
126.4 257.8 (Rwy 18C-36C)  
133.35 257.8 (Rwy 18R-36L)  
CHARLOTTE DEP CON  
120.5 257.2



### TAKEOFF MINIMUMS

Rwys 18C/L/R, 23, 36C/R: Standard with minimum climb of 500' per NM to 1260.

Rwy 5: Standard with minimum climb of 500' per NM to 1300.

Rwy 36L: Standard with minimum climb of 500' per NM to 1400.

NASHVILLE  
BNA

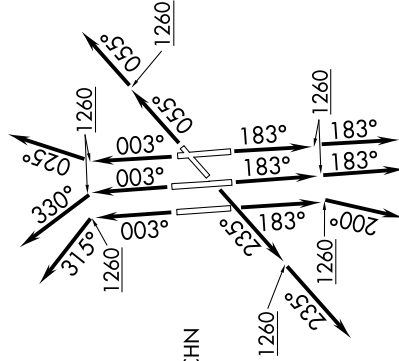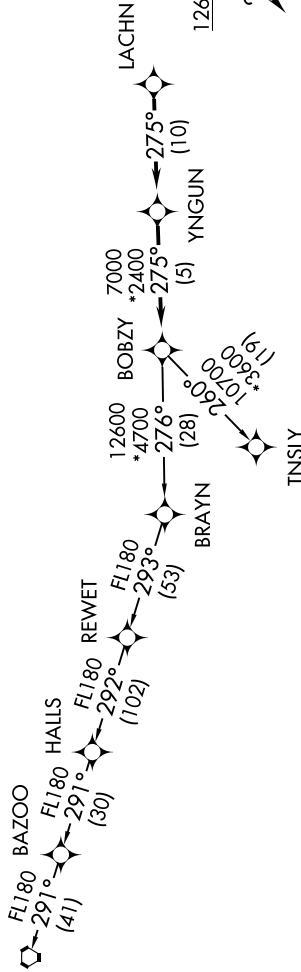

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SE-2, 25 FEB 2021 to 25 MAR 2021

# BOBZY FOUR DEPARTURE (RNAV)