

RNAV (RNP) Z RWY 10L

JOHN GLENN COLUMBUS INTL (CMH)

APP CRS	Rwy Idg	8000
101°	TDZE	815
	Apt Elev	815

RNP AR APCH.



Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below -18°C or above 54°C. For inoperative ALS, increase RNP 0.13 all Cats visibility to RVR 5500, increase RNP 0.26 all Cats visibility to 1¼ SM and increase RNP 0.30 all Cats visibility to 1½ SM.

MALSRL




MISSED APPROACH:
Climb to 1400 then climbing left turn to 3000 direct APE VORTAC and hold.

D-ATIS	COLUMBUS APP CON	COLUMBUS TOWER	GND CON	CLNC DEL	CPDLC
124.6	125.95 371.975	132.7 257.8	121.9 348.6	126.3	

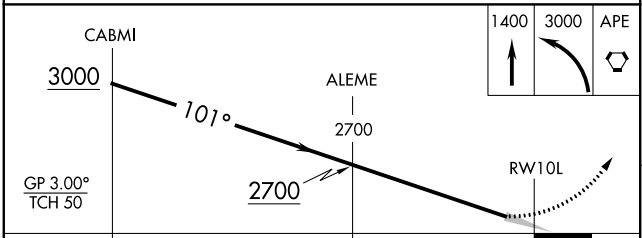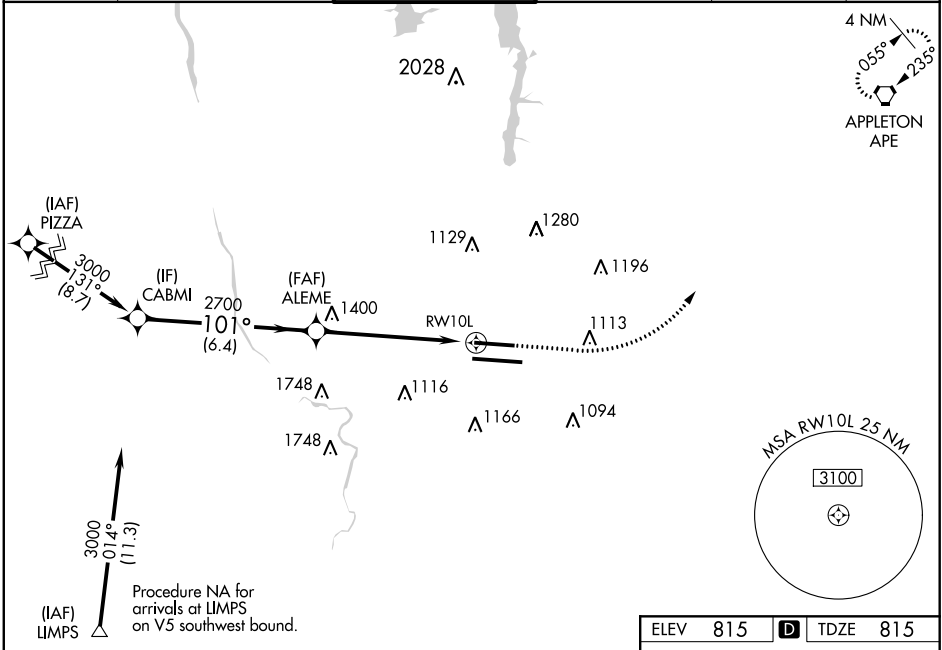

ELEV	815	D	TDZE	815
------	------------	----------	------	------------

CATEGORY	A	B	C	D
RNP 0.13 DA		1142/40	327 (400-¾)	
RNP 0.26 DA		1193/40	378 (400-¾)	
RNP 0.30 DA		1246/50	431 (500-1)	



AUTHORIZATION REQUIRED

TDZ/CL Rwy 10R-28L
HIRL Rwy 10R-28L and 10L-28R