

HOODO SIX DEPARTURE (RNAV)

SC-5, 25 FEB 2021 to 25 MAR 2021


ATIS 118.325
CLNC DEL 120.45
119.55 (when tower closed)
GND CON 120.45
CONROE TOWER * 124.125 (CTAF)
HOUSTON DEP CON 119.7 281.4

NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: ATC assigned only.
NOTE: DME/DME/IRU or GPS required.
NOTE: For non-GPS equipped aircraft, LCH, ILLA, TBD, and LEV DME's must be operational.


TAKEOFF MINIMUMS

Rwys 1, 14, 19, 32: Standard with minimum climb of 500' per NM to 760.

TOP ALTITUDE: ASSIGNED BY ATC

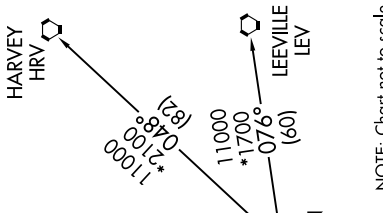

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

- TAKEOFF RWY 1: Climb heading 012° to 760, for RADAR vectors to VUH VOR/DME, thence
- TAKEOFF RWY 14: Climb heading 140° to 760, for RADAR vectors to VUH VOR/DME, thence
- TAKEOFF RWY 19: Climb heading 192° to 760, for RADAR vectors to VUH VOR/DME, thence
- TAKEOFF RWY 32: Climb heading 320° to 760, for RADAR vectors to VUH VOR/DME, thence

. . . . on track 118° to HOODO, then on (transition). Maintain ATC assigned altitude. Expect filed altitude 10 minutes after departure.

- BOWFN TRANSITION (HOODO6.BOWFN)
- CFOOD TRANSITION (HOODO6.CFOOD)
- HARVEY TRANSITION (HOODO6.HRV)
- LEEVILLE TRANSITION (HOODO6.LEV)
- SBIRD TRANSITION (HOODO6.SBIRD)

SC-5, 25 FEB 2021 to 25 MAR 2021