RNAV (GPS) RWY 36L

DALLAS-FORT WORTH INTL (DFW)

WAAS	APP CRS	Rwy Idg	13400
CH 93805	356°	TDZE	588
W36B		Apt Elev	607

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C (25°F) or above 54°C (130°F). For inop MALSR, increase LNAV Cat C/D visibility to RVR 5500. Simultaneous approach authorized with Rwy 35L/C/R. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 3000 direct KAGLE and hold.

D-ATIS	REGIONAL APP CON	DFW TOWER	GND CON	CLNC DEL	CPDLC
ARR 123.775 DEP 135.925	118.425	126.55 127.5 EAST 124.15 134.9 WEST	121.65 121.8 EAST 121.85 WEST	128.25	

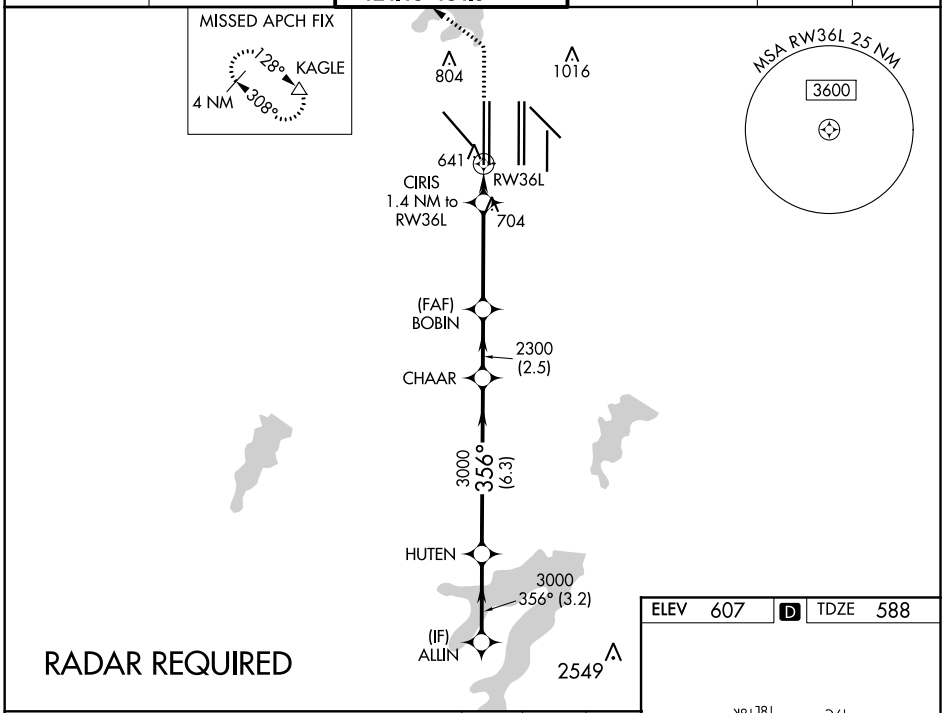

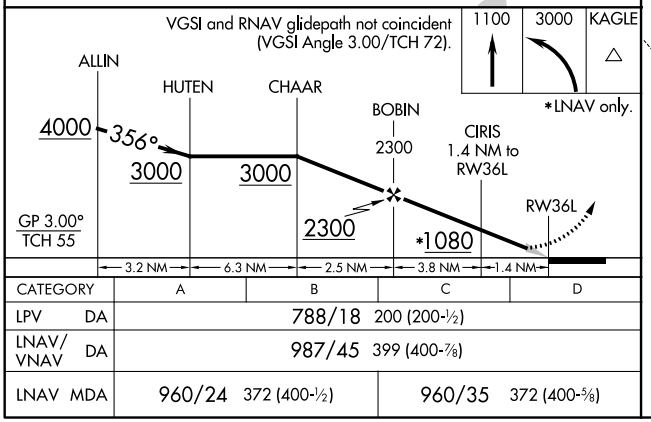

CATEGORY	A	B	C	D
LPV DA	788/18 200 (200-½)			
LNAV/VNAV DA	987/45 399 (400-⅞)			
LNAV MDA	960/24 372 (400-½)		960/35 372 (400-⅝)	

ELEV 607 D TDZE 588

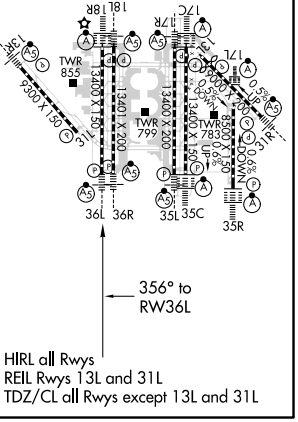

SC-2, 25 FEB 2021 to 25 MAR 2021
SC-2, 25 FEB 2021 to 25 MAR 2021