RNAV (RNP) Z RWY 13R

DALLAS-FORT WORTH INTL (DFW)

APP CRS	Rwy Idg	TDZE	Apt Elev
135°	9300	591	606

RNP AR APCH. RF required.

For uncompensated Baro-VNAV systems, procedure NA below -6°C or above 54°C. Missed approach requires RNP less than 1.0.

MALSR

MISSED APPROACH: (Do not exceed 185K until HRNTT) Climb to 3000 on the RNAV missed approach route to SLOTT and hold.

D-ATIS	REGIONAL APP CON	DFW TOWER	GND CON	CLNC DEL	CPDLC
ARR 123.775 DEP 135.925	133.15 118.1	126.55 127.5 EAST 124.15 134.9 WEST	121.65 121.8 EAST 121.85 WEST	128.25	

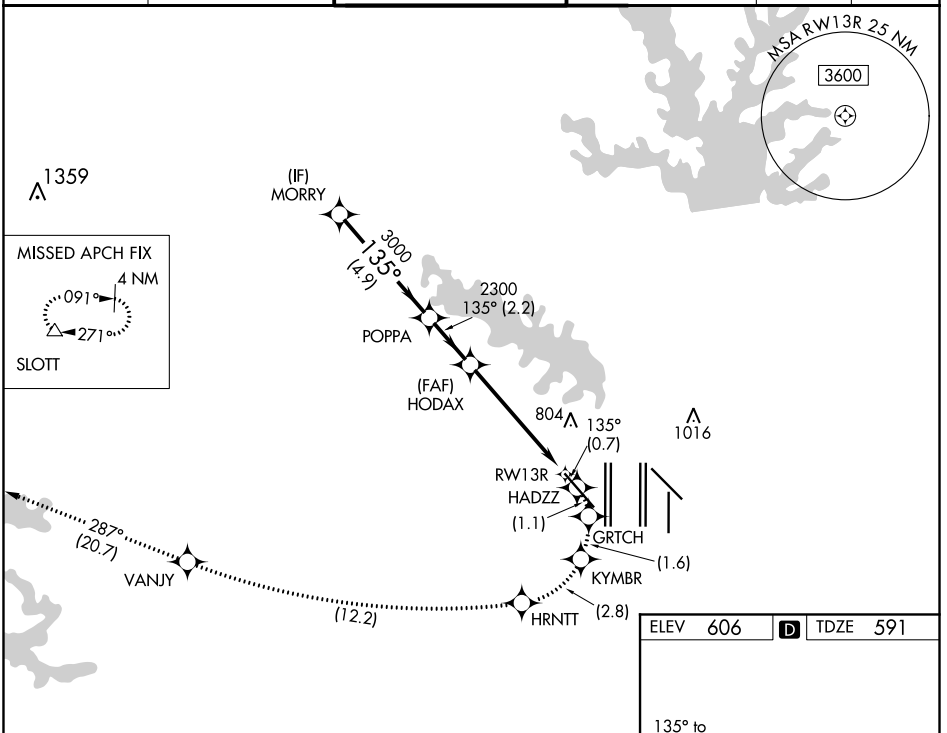

3000 tr 135°	HADZZ	GRTCH	KYMBR	HRNTT	VANJY	tr 287°	SLOTT

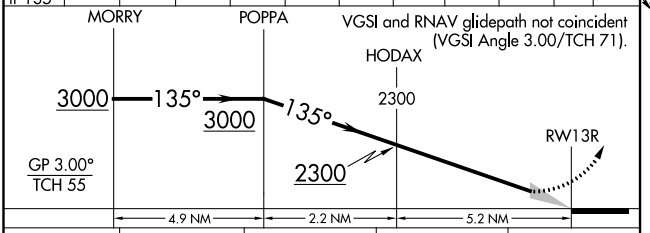

CATEGORY	A	B	C	D
RNP 0.30 DA	1041/45	450 (500-⅞)		

AUTHORIZATION REQUIRED

ELEV 606 D TDZE 591



HIRL all Rwys
REIL Rwys 13L and 31L
TDZ/CL all Rwys except 13L and 31L

SC-2, 25 FEB 2021 to 25 MAR 2021
SC-2, 25 FEB 2021 to 25 MAR 2021