RNAV (GPS) Y RWY 31L

DALLAS-FORT WORTH INTL (DFW)

WAAS	APP CRS	Rwy Idg	9300
CH 99703	315°	TDZE	581
W31A		Apt Elev	607

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C (25°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 31R. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 3000 direct HODAX and on track 306° to KAGLE and hold.

D-ATIS	REGIONAL APP CON	DFW TOWER	GND CON	CLNC DEL	CPDLC
ARR 123.775 DEP 135.925	118.425 127.075 119.4	126.55 127.5 EAST 124.15 134.9 WEST	121.65 121.8 EAST 121.85 WEST	128.25	

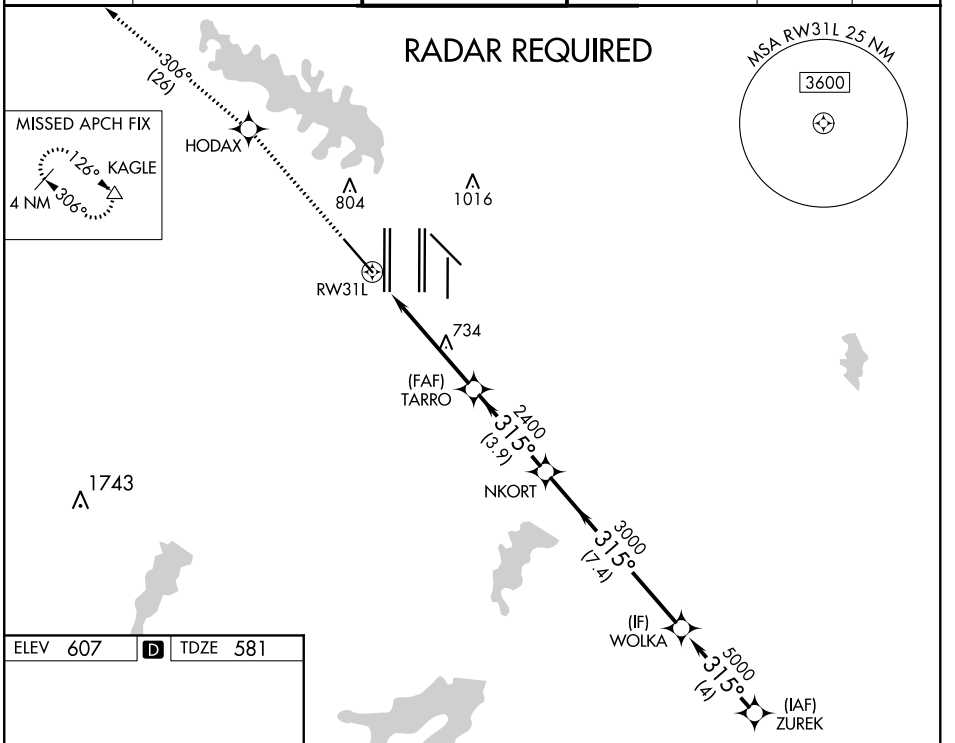

ELEV 607 | D | TDZE 581



HIRL all Rwys
REIL Rwys 13L and 31L
TDZ/CL all Rwys except 13L and 31L

3000	HODAX	tr 306°	KAGLE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.13/TCH 72).

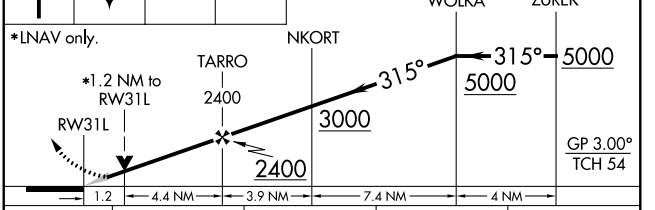

CATEGORY	A	B	C	D
LPV DA		831/40	250 (300-¾)	
LNAV/VNAV DA		907/50	326 (400-1)	
LNAV MDA	1060/55	479 (500-1)	1060-1⅜	479 (500-1⅜)

SC-2, 25 FEB 2021 to 25 MAR 2021
SC-2, 25 FEB 2021 to 25 MAR 2021