ILS or LOC/DME RWY 27

ESLER RGNL (ESF)

LOC I-ESF 111.5 Chan 52	APP CRS 270°	Rwy Idg 5999 TDZE 92 Apt Elev 112

T NA When VGSI inop, Circling Rwy 14-32 NA at night. DME or Radar required. VDP NA with Alexandria Intl altimeter setting. When local altimeter setting not received, use Alexandria Intl altimeter setting and increase all DA 35 feet and all MDA 40 feet. For inoperative MALSR, increase S-LOC 27 Cat C/D visibility to 1⅛ mile.

MALSR A5

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 on heading 120° and on AEX VORTAC R-067 to LARTO/ AEX 24.1 DME/RADAR and hold.

ESF ASOS 119.425	POLK APP CON 125.4 254.8	UNICOM 122.8 (CTAF) L

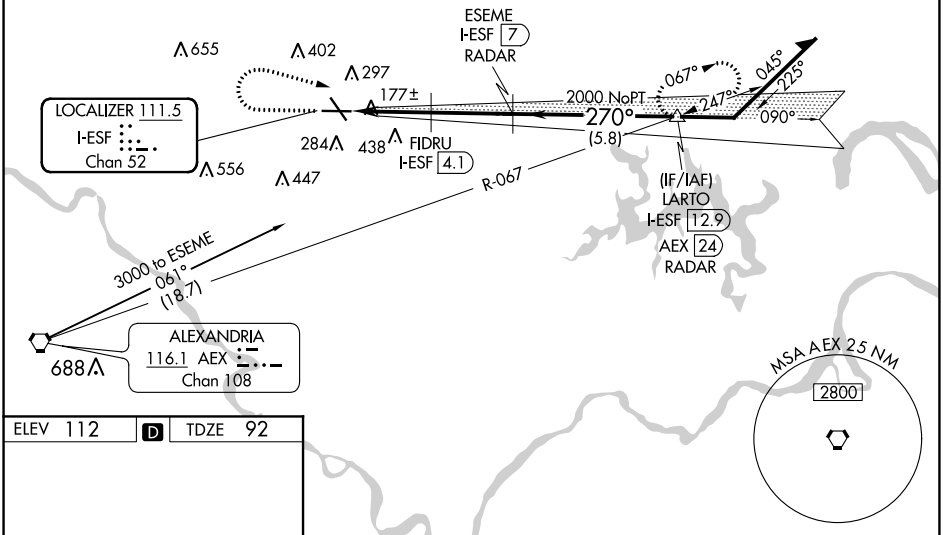

ELEV 112 D TDZE 92



1500	3000	AEX R-067	LARTO AEX 24.1 RADAR
	hdg 120°		

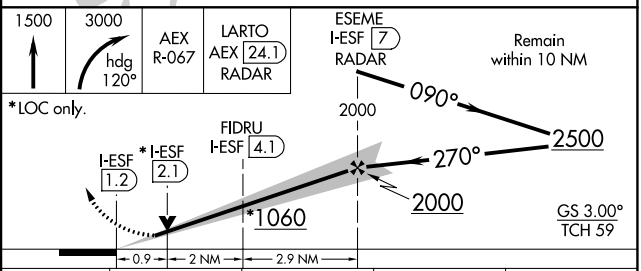

CATEGORY	A	B	C	D
S-ILS 27	292-½ 200 (200-½)			
S-LOC 27	440-½ 348 (400-½)		440-⅝ 348 (400-⅝)	
CIRCLING	600-1 488 (500-1)		600-1½ 488 (500-1½)	740-2 628 (700-2)

REIL Rwys 9, 14 and 32 L
MIRL Rwy 14-32 L
HIRL Rwy 9-27 L

SC-4, 25 FEB 2021 to 25 MAR 2021
SC-4, 25 FEB 2021 to 25 MAR 2021