RNAV (GPS) RWY 4L

NEWARK LIBERTY INTL (EWR)

WAAS CH 56224 W04A	APP CRS 039°	Rwy Idg 8460 / TDZE 10 / Apt Elev 17

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. For inop ALS, increase LPV all Cats visibility to RVR 5500. When Circling to Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.

MALSR

MISSED APPROACH: Climb to 440 then climbing right turn to 2500 direct JEVAP and on track 022° to TEB VOR/DME and hold.

D-ATIS	NEW YORK APP CON	NEWARK TOWER	GND CON	CLNC DEL	CPDLC
115.7 134.825	128.55 379.9	118.3 257.6	121.8	118.85	

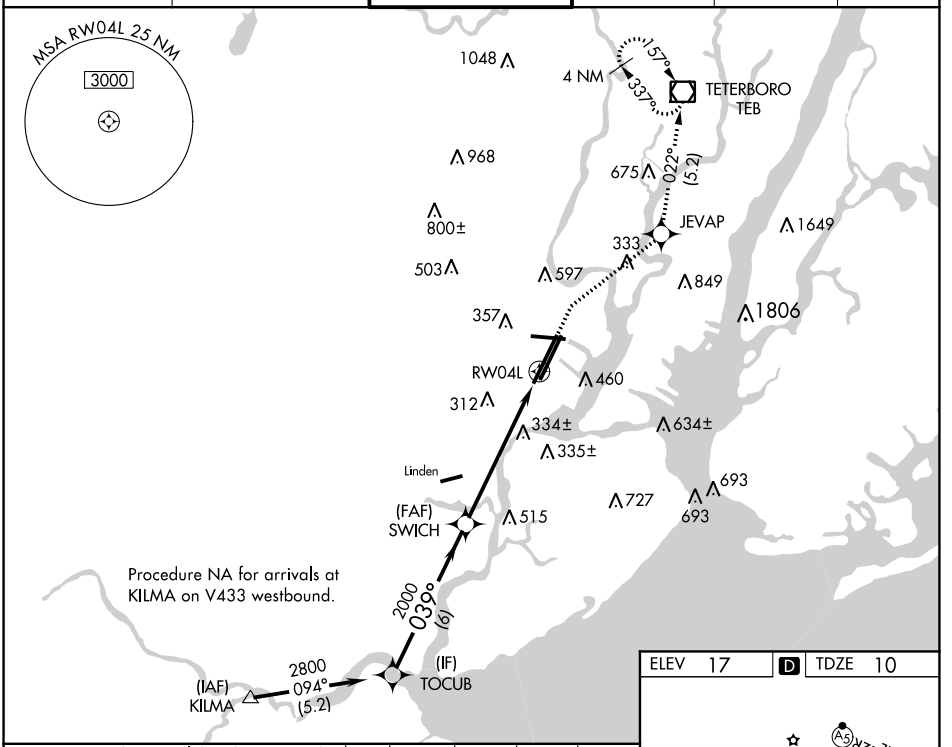

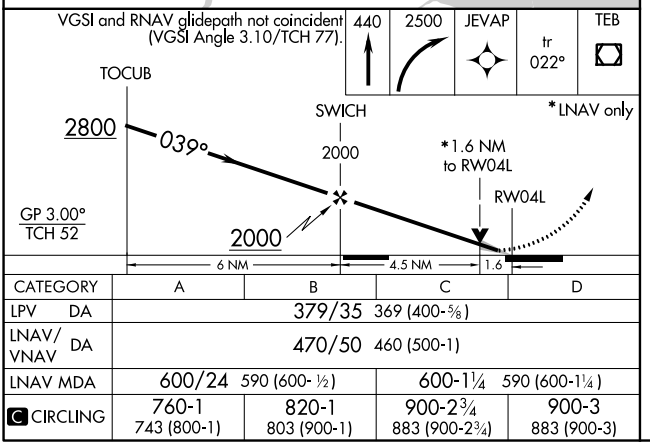

CATEGORY	A	B	C	D
LPV DA	379/35 369 (400-⅝)			
LNAV/VNAV DA	470/50 460 (500-1)			
LNAV MDA	600/24 590 (600-½)		600-1¼ 590 (600-1¼)	
C CIRCLING	760-1 743 (800-1)	820-1 803 (900-1)	900-2¾ 883 (900-2¾)	900-3 883 (900-3)

ELEV 17 D TDZE 10

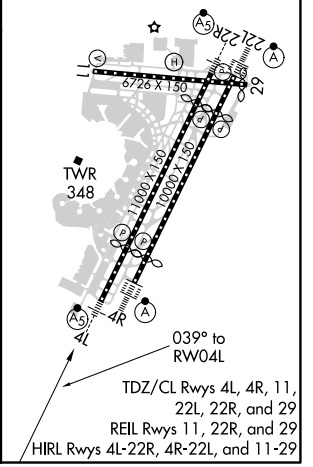

NE-2, 25 FEB 2021 to 25 MAR 2021
NE-2, 25 FEB 2021 to 25 MAR 2021