

WAAS CH 61310 W27A	APP CRS 269°	Rwy Idg TDZE Apt Elev	6502 139 147
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 27

FLORENCE RGNL (FLO)

Baro-VNAV NA when using Darlington altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. MISSED APPROACH: Climb to 2000 direct IMOVE and hold.

When local altimeter setting not received, use Darlington altimeter setting and increase all DA/MDA 60 feet. Increase LPV and LNAV/VNAV all Cats visibility ¼ mile and LNAV Cat D ½ mile. Night Landing: Rwy 1, 19 NA.


ATIS 123.625	FLORENCE APP CON* 118.6 341.7 (256°-074°) 135.25 316.15 (075°-255°)	FLORENCE TOWER* 125.1 (CTAF) 353.85	GND CON 121.9 353.85	CLNC DEL 121.9 353.85	UNICOM 122.95
------------------------	---	--	--------------------------------	---------------------------------	-------------------------

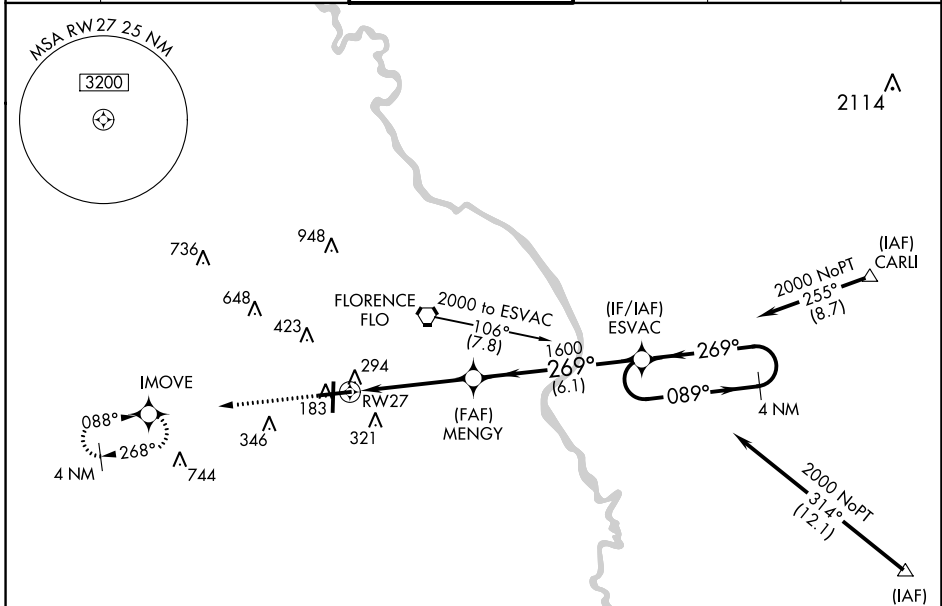

SE-2, 25 FEB 2021 to 25 MAR 2021

SE-2, 25 FEB 2021 to 25 MAR 2021

ELEV 147	TDZE 139
-----------------	-----------------

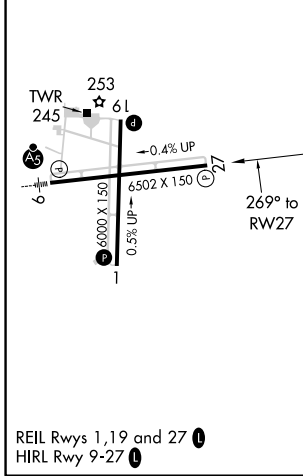

2000	IMOVE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 46).	ESVAC	4 NM Holding Pattern
				2000
				GP 3.00° TCH 46

CATEGORY	A	B	C	D
LPV DA		474-1¼	335 (400-1¼)	
LNAV/VNAV DA		595-1¾	456 (500-1¾)	
LNAV MDA	560-1	421 (500-1)	560-1¼	421 (500-1¼)
CIRCLING	640-1 493 (500-1)	660-1 513 (600-1)	660-1½ 513 (600-1½)	740-2 593 (600-2)