


WAAS CH <b>82524</b> <b>W01A</b>	APP CRS <b>013°</b>	Rwy Idg TDZE <b>72</b> Apt Elev <b>80</b>
--	------------------------	---

# RNAV (GPS) RWY 1

REPUBLIC (F.R.G)

RNP APCH.	MISSED APPROACH: (Max 190K) Climb to 2000 then climbing right turn to 3000 direct DPK VOR/DME and hold.
<p><b>⚠</b> When local altimeter setting not received, use Islip altimeter setting and increase all MDA 40 feet and LNAV Cats C/D visibility 1/8 SM and Circling Cats C/D visibility 1/4 SM. Rwy 1 helicopter visibility reduction below 1 SM NA.</p>	

ATIS <b>126.65</b>	NEW YORK APP CON <b>128.125 269.0</b>	REPUBLIC TOWER ★ <b>118.8 (CTAF) 0 279.65</b>	GND CON <b>121.6 269.6</b>	CLNC DEL <b>128.25</b>	UNICOM <b>122.95</b>
-----------------------	--	--	-------------------------------	---------------------------	-------------------------


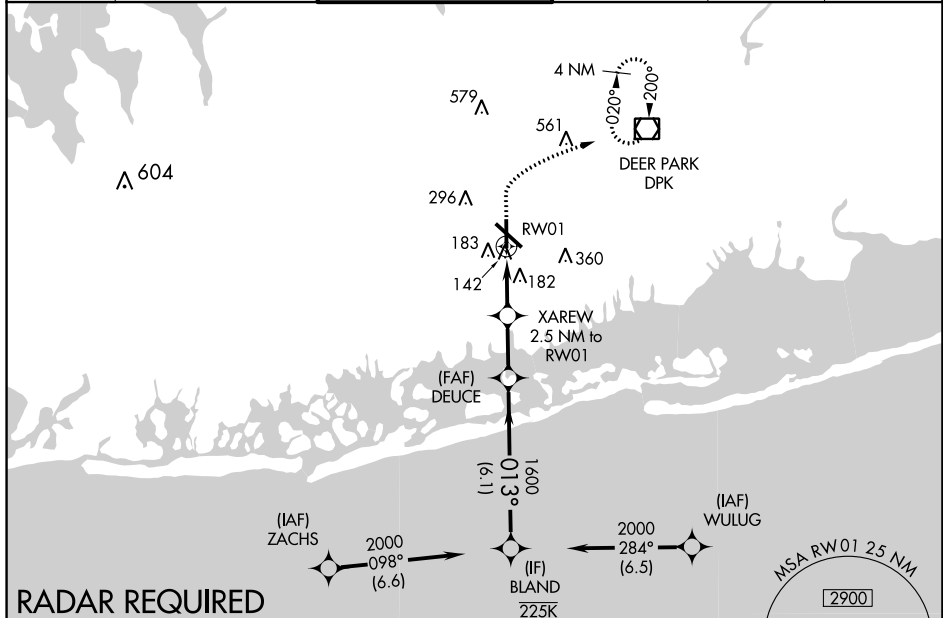


NE-2, 25 FEB 2021 to 25 MAR 2021

NE-2, 25 FEB 2021 to 25 MAR 2021

## RADAR REQUIRED

ELEV 80	<b>D</b>	TDZE 72
---------	----------	---------

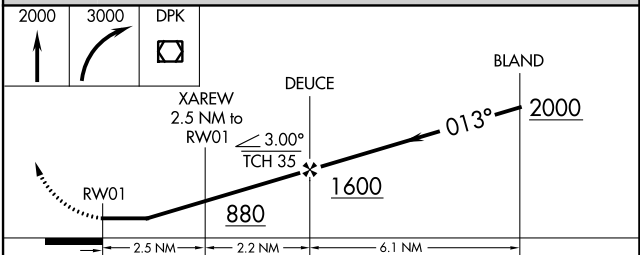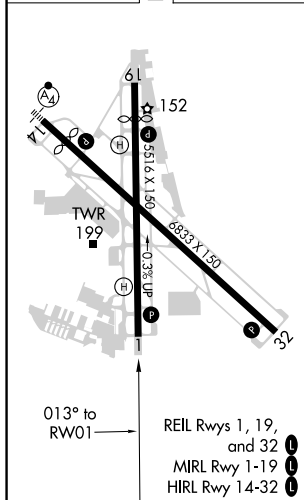

CATEGORY	A	B	C	D
LP MDA	400-1 328 (400-1)			
LNAV MDA	460-1	388 (400-1)	460-1 1/8	388 (400-1 1/8)
CIRCLING	560-1 480 (500-1)	600-1 520 (600-1)	720-1 3/4 640 (700-1 3/4)	720-2 640 (700-2)