

|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>40135</b><br><b>W33A</b> | APP CRS<br><b>330°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>8000</b><br><b>1424</b><br><b>1430</b> |
|--|------------------------|-----------------------------|---|


# RNAV (GPS) RWY 33

JOE FOSS FIELD (FSD)

**ASR**  
 -31°C  
 For uncompensated Baro-VNAV systems, procedure NA below -22°C (-7°F) or above 54°C (130°F). Rwy 33 helicopter visibility reduction below 3/4 SM NA.  
 DME/DME RNP-0.3 NA.

**MISSED APPROACH:**  
 Climb to 3800 direct  
 CEPOL and hold.



|                      |   |   |                               |                         |
|----------------------|---|---|-------------------------------|-------------------------|
| ATIS<br><b>126.6</b> | SIoux FALLS APP CON *<br><b>125.8 284.725</b> | SIoux FALLS TOWER *<br><b>118.3(CTAF) 0 257.8</b> | GND CON<br><b>121.9 348.6</b> | UNICOM<br><b>122.95</b> |
|----------------------|---|---|-------------------------------|-------------------------|

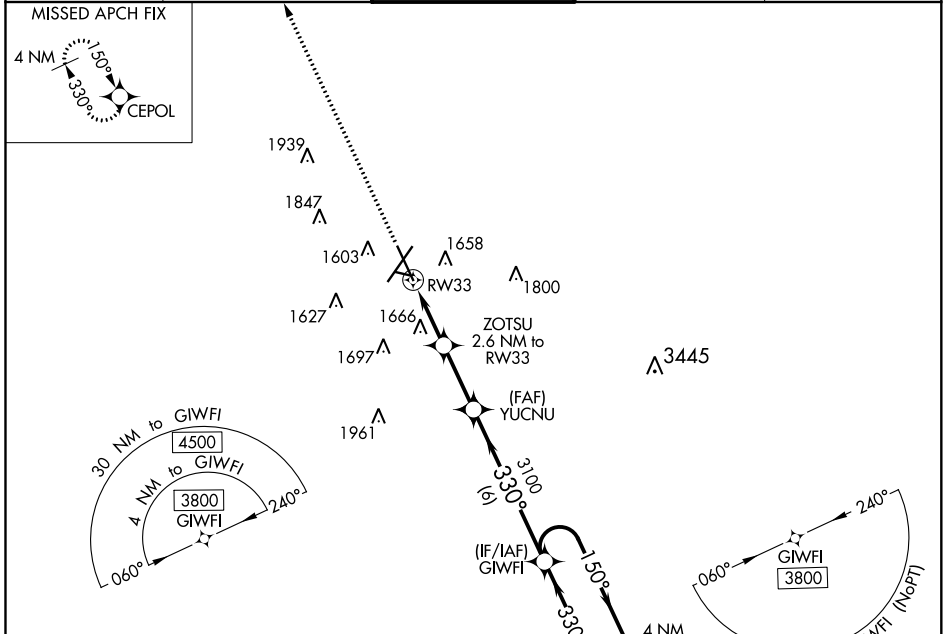

NC-1, 25 FEB 2021 to 25 MAR 2021

NC-1, 25 FEB 2021 to 25 MAR 2021

|           |          |           |
|-----------|----------|-----------|
| ELEV 1430 | <b>D</b> | TDZE 1424 |
|-----------|----------|-----------|

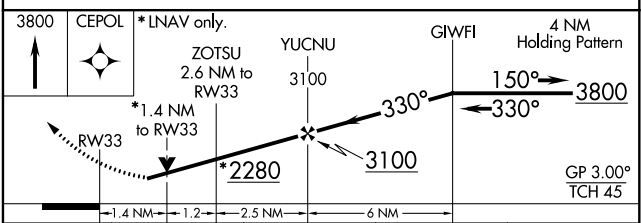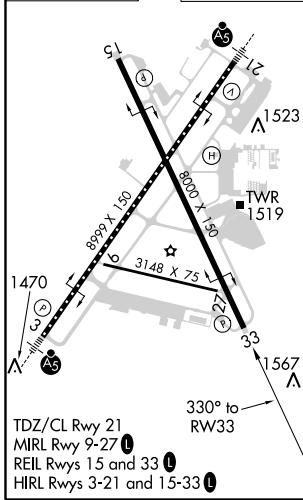

| CATEGORY          | A                  | B                  | C                          | D                          |
|-------------------|--------------------|--------------------|----------------------------|----------------------------|
| LPV DA            | 1729-1             |                    | 305 (300-1)                |                            |
| LNNAV/VNAV DA     | 1974-1 1/8         |                    | 550 (600-1 1/8)            |                            |
| LNNAV MDA         | 1920-1 496 (500-1) |                    | 1920-1 1/8 496 (500-1 1/8) |                            |
| <b>C</b> CIRCLING | 1960-1 530 (600-1) | 1980-1 550 (600-1) | 2060-1 3/4 630 (700-1 3/4) | 2200-2 1/2 770 (800-2 1/2) |