ILS or LOC RWY 25

FORT SMITH RGNL (FSM)

LOC I-FSM	APP CRS	Rwy Idg	8017
111.3	256°	TDZE	453
		Apt Elev	469

DME required.

T A ASR Circling NA for Cat E when R-2401B active. Circling NA for Cat E NW of Rwys 7 and 19. For inop ALS, increase S-ILS 25 Cat E visibility to RVR 4000 and S-LOC 25 Cat C/D/E to 1⅝ SM.
* RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1400 then climbing left turn to 4000 on heading 220° and FSM VORTAC R-232 to SPIRO/FSM 15 DME and hold, continue climb-in-hold to 4000.

ATIS	RAZORBACK APP CON*	FORT SMITH TOWER*	GND CON	CLNC DEL	UNICOM
126.3	120.9 343.75	118.3 (CTAF) L 323.175	121.9 275.8	133.85 278.3	122.95

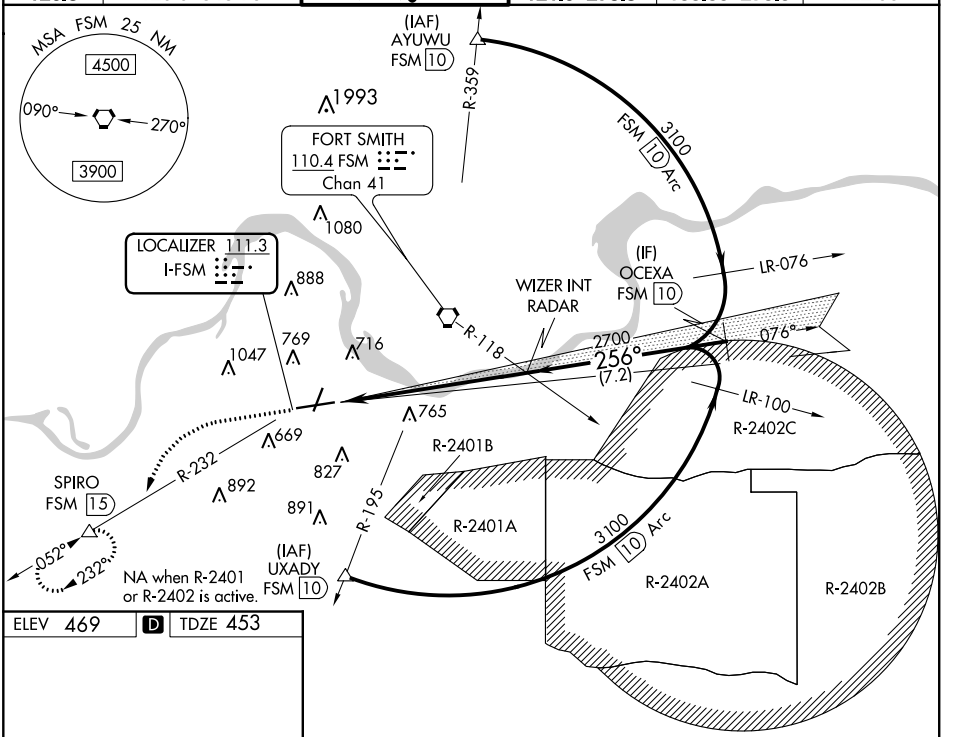

ELEV 469 D TDZ 453



HIRL Rwy 7-25 L
MIRL Rwy 1-19 L

FAF to MAP 7 NM

Knots	60	90	120	150	180
Min:Sec	7:00	4:40	3:30	2:48	2:20

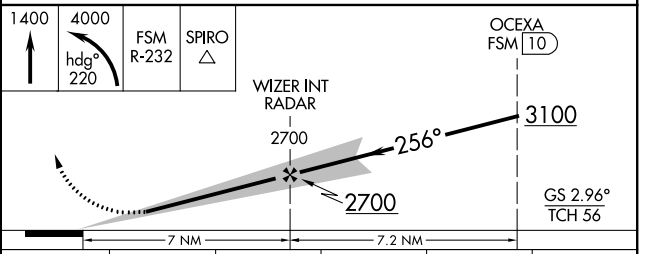

CATEGORY	A	B	C	D	E
S-ILS 25 *	653/24 200 (200-½)				
S-LOC 25	1020/24 567 (600-½)		1020-1¼ 567 (600-1¼)		
C CIRCLING	1140-1 671 (700-1)		1400-2¾ 931(1000-2¾)	1400-3 931 (1000-3)	

SC-1, 25 FEB 2021 to 25 MAR 2021
SC-1, 25 FEB 2021 to 25 MAR 2021