WAAS	APP CRS	Rwy Idg	6005
CH 50330	347°	TDZE	1241
W34A		Apt Elev	1252

RNAV (GPS) RWY 34

DRAKE FIELD (FYV)

Inop table does not apply to LP Cat A and and LP/LNAV Cat C and D. For inop ODALS when using Springdale altimeter setting, increase LNAV Cat C and D visibility to 3 miles. Circling NA east of Rwy 16-34. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. VDP NA with Springdale altimeter setting. When local altimeter setting not received, use Springdale altimeter setting and increase all MDA 40 feet. Increase LNAV Cat B and Circling Cat B and C visibility ¼ mile.

ODALS

MISSED APPROACH: Climb to 3000 direct ELMIE and hold.

ATIS	RAZORBACK APP CON★	DRAKE TOWER★	GND CON	UNICOM
119.575	121.0 244.575	128.0 (CTAF) L 371.9	121.8	122.95

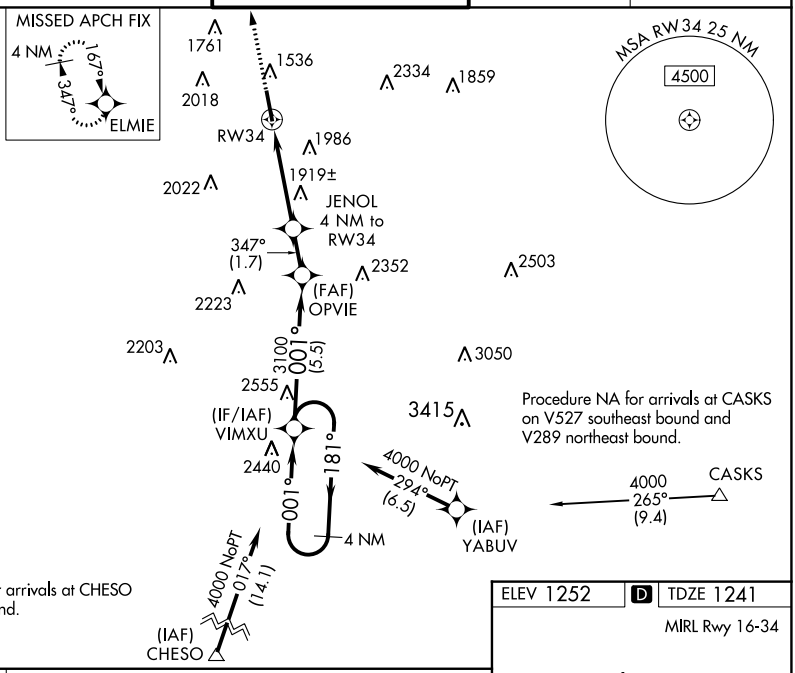

ELEV 1252 D TDZE 1241

MIRL Rwy 16-34

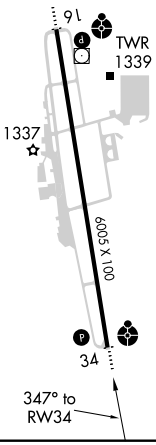

3000 ELMIE

*LNAV only.

VGSI and descent angles not coincident (VGSI Angle 3.50/TCH 58).

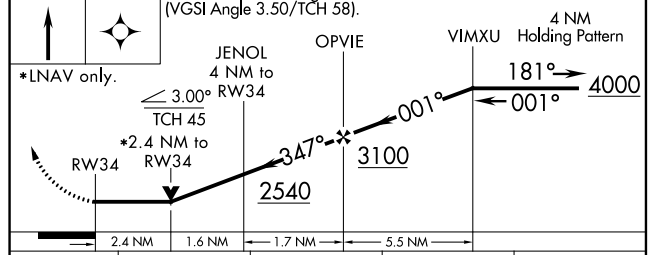

CATEGORY	A	B	C	D
LP MDA	2120-1	879 (900-1)	2120-2½	879 (900-2½)
LNAV MDA	2180-1	939 (1000-1)	2180-2½	939 (1000-2½)
C CIRCLING	2180-1¼	928 (1000-1¼)	2320-3	1068 (1100-3)

SC-1, 25 FEB 2021 to 25 MAR 2021
SC-1, 25 FEB 2021 to 25 MAR 2021