RNAV (GPS) RWY 19

SHELBYVILLE MUNI (GEZ)

WAAS	APP CRS	Rwy Idg	5000
CH 53603	189°	TDZE	803
W19A		Apt Elev	803

RNP APCH.

Circling Rwy 9, 27 NA at night. Baro-VNAV NA when using Indianapolis Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. VDP NA when using Indianapolis Intl altimeter setting. When local altimeter setting not received, use Indianapolis Intl altimeter setting: increase LPV DA to 1152 feet and LNAV/VNAV DA to 1199 feet; increase all MDAs 60 feet and LNAV visibility Cats C and D ⅛ SM.

MISSED APPROACH: Climb to 3000 direct WAGSE and hold.

ASOS	INDIANAPOLIS APP CON	UNICOM
121.55	127.15 317.8	122.8 (CTAF) L

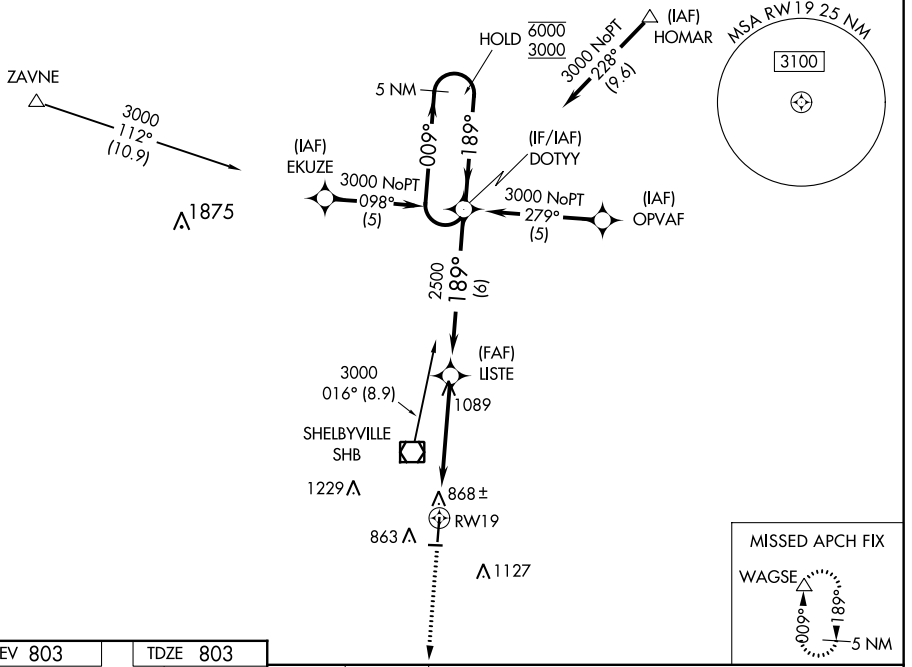

ELEV 803 TDZE 803

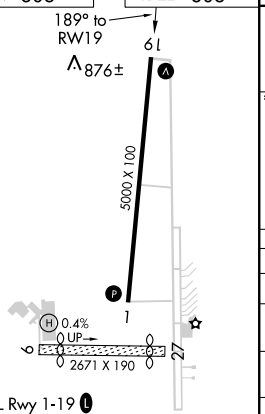

MIRL Rwy 1-19 L
REIL Rwys 1 and 19 L

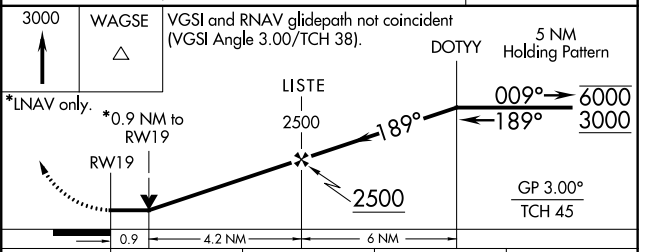

CATEGORY	A	B	C	D
LPV DA	1095-1 292 (300-1)			
LNAV/ VNAV DA	1142-1¼ 339 (400-1¼)			
LNAV MDA	1140-1 337 (400-1)			
CIRCLING	1200-1 397 (400-1)	1260-1 457 (500-1)	1320-1½ 517 (600-1½)	1480-2¼ 677 (700-2¼)

EC-2, 25 FEB 2021 to 25 MAR 2021
EC-2, 25 FEB 2021 to 25 MAR 2021