ILS or LOC RWY 13

EAST TEXAS RGNL (GGG)

LOC I-GGG	APP CRS	Rwy Idg	9200
109.5	131°	TDZE	358
		Apt Elev	365

ADF or DME required for procedure entry.

For inoperative MALSR, increase S-ILS-13 Cat E visibility to RVR 4000, S-LOC-13 Cat E visibility to 1¾. When local altimeter setting not received, use Gilmer altimeter setting and increase all DA 59 feet, all MDA 60 feet and visibility S-LOC 13 and circling Cat D, E ¼ mile. For inoperative MALSR when using Gilmer altimeter setting, increase visibility S-ILS 13 all Cats to RVR 5000 and S-LOC 13 Cat E to 2. * RVR 1800 authorized with the use of FD or AP or HUD to DA (NA when using Gilmer altimeter setting).

MALSR

MISSED APPROACH: Climb to 3000 via GGG VORTAC R-126 to ARGEN Int/GGG 14 DME and hold.

ATIS	LONGVIEW APP CON *	EASTEX TOWER *	GND CON	UNICOM
119.65	128.75 379.15	119.2 (CTAF) L 377.05	121.6	122.95

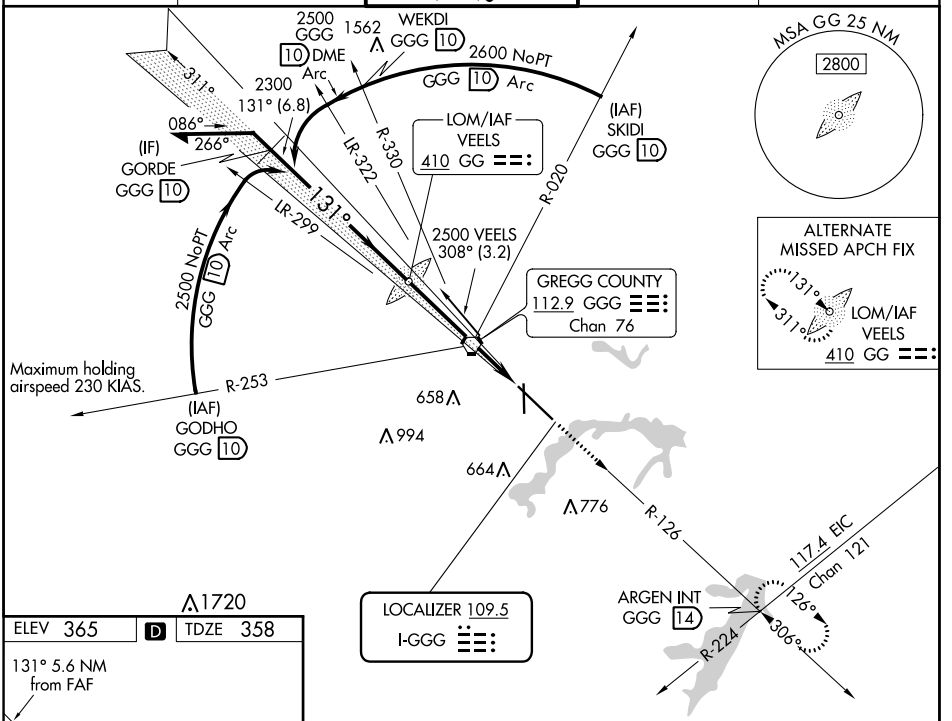



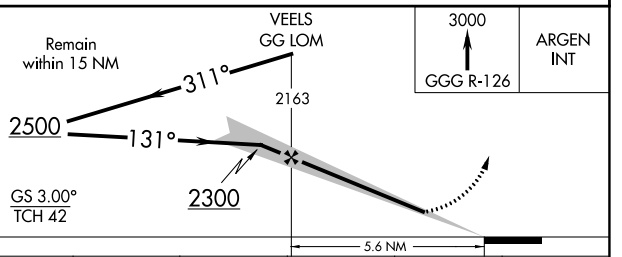

HIRL Rwy 13-31 L
MIRL Rwy 18-36

FAF to MAP 5.6 NM

Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52

CATEGORY	A	B	C	D	E
S-ILS 13	*558/24 200 (200-½)				558/24 200 (200-½)
S-LOC 13	860/24 502 (500-½)		860/50 502 (500-1)		860/60 502 (500-1¼)
CIRCLING	860-1 495 (500-1)		860-1½ 495 (500-1½)	920-2 555 (600-2)	1080-2½ 715 (800-2½)

SC-2, 25 FEB 2021 to 25 MAR 2021
SC-2, 25 FEB 2021 to 25 MAR 2021