

WAAS CH <b>40029</b> W31A	APP CRS <b>311°</b>	Rwy Idg <b>7000</b> TDZE <b>202</b> Apt Elev <b>208</b>
---------------------------------	------------------------	---

# RNAV (GPS) RWY 31


GRENADA MUNI (GNF)

RNP APCH.

**⚠** Baro-VNAV and VDP NA when using Greenwood altimeter setting. Rwy 31 helicopter visibility reduction below  $\frac{3}{4}$  SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C or above 46°C. When local altimeter setting not received use Greenwood altimeter setting: increase all DAs 65 feet and visibility LNAV/VNAV Cat C and D  $\frac{1}{8}$  SM; increase all MDAs 80 feet and visibility LNAV Cats C and D and Circling all Cats  $\frac{3}{8}$  SM. Circling Rwy 4, 22, NA at night.

**MISSED APPROACH:** Climb to 3000 direct WUKNA and hold.



AWOS-3PT <b>118.025</b>	MEMPHIS CENTER <b>128.5 381.4</b>	UNICOM <b>122.8 (CTAF)</b>
----------------------------	--------------------------------------	-------------------------------

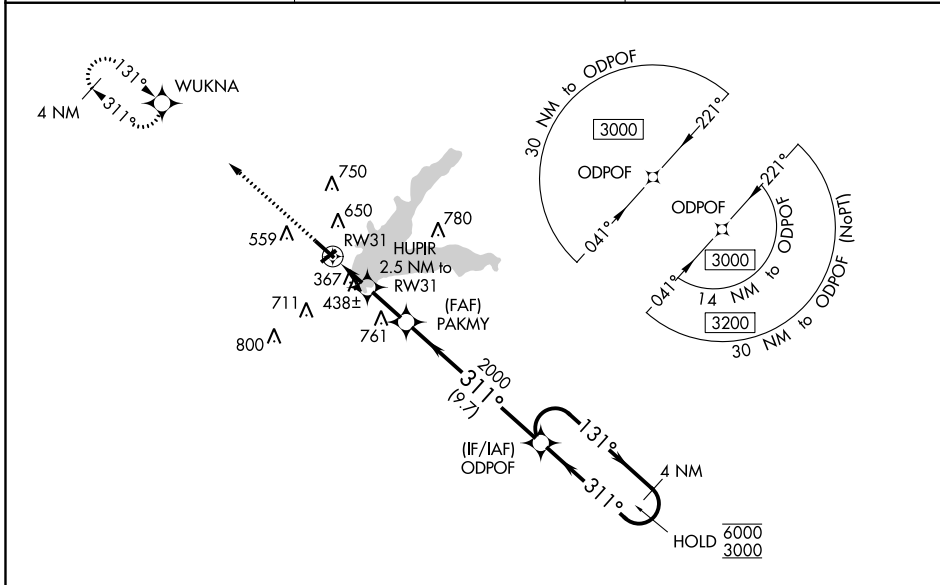

SC-4, 25 FEB 2021 to 25 MAR 2021

SC-4, 25 FEB 2021 to 25 MAR 2021

ELEV 208	TDZE 202
----------	----------

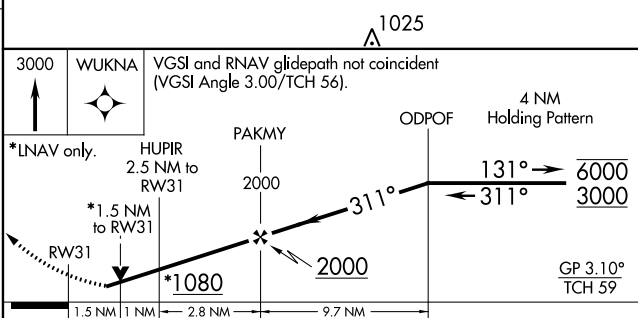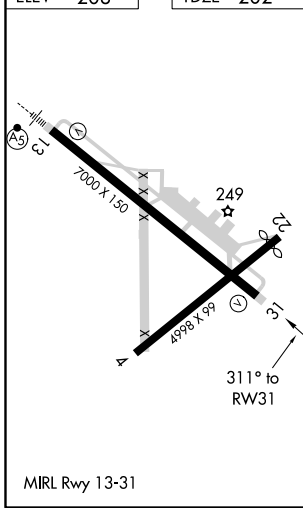

CATEGORY	A	B	C	D
LPV DA	513-1 311 (400-1)			
LNAV/VNAV DA	679-1½ 477 (500-1½)			
LNAV MDA	720-1	518 (600-1)	720-1¼	518 (600-1¼)
<b>C</b> CIRCLING	1000-1	792 (800-1)	1000-2¼ 792 (800-2¼)	1060-2¾ 852 (900-2¾)