


SC-5, 25 FEB 2021 to 25 MAR 2021

TOP ALTITUDE:
16000

TAKEOFF MINIMUMS
Rwys 15L/R, 26L/R, 27, 33L/R: Standard with minimum climb of 500' per NM to 1200.

NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.
NOTE: For use during west flow at IAH, for east flow file the PITZZ DEPARTURE.

D-ATIS
124.05
CLNC DEL
128.1
CPDC
GND CON
118.575 (Rwys 8L/R, 26L/R, 9, 27)
121.7 (Rwys 15L/R, 33L/R)
HOUSTON TOWER
120.725 290.2 (Rwys 8L, 26R)
125.35 290.2 (Rwys 8R, 26L)
127.3 288.25 (Rwys 15L/R, 33L/R)
135.15 290.2 (Rwys 9, 27)
HOUSTON DEP CON
126.675 339.8

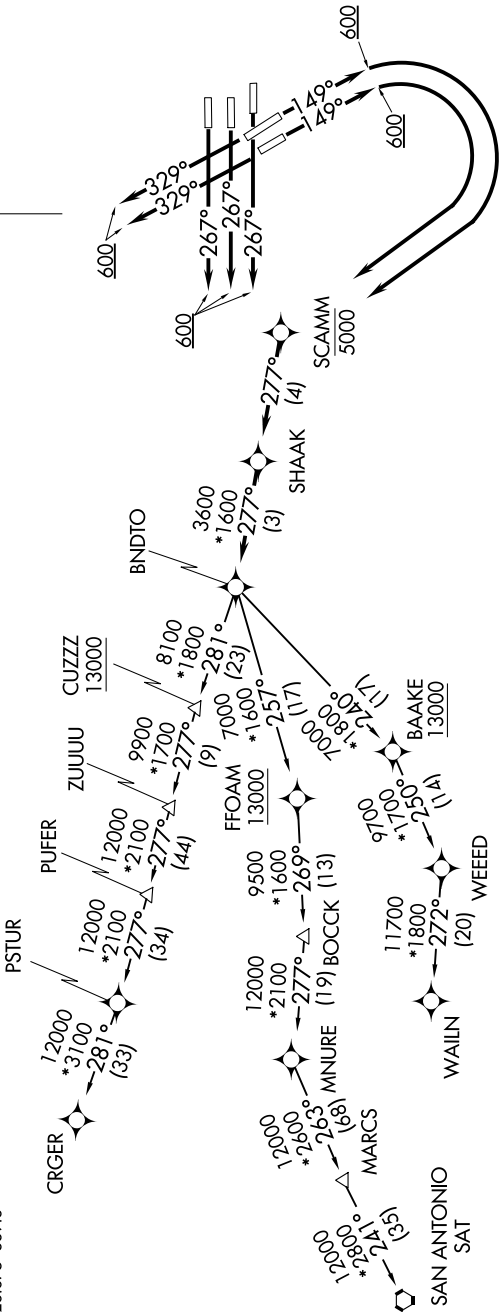

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

SC-5, 25 FEB 2021 to 25 MAR 2021