

# RNAV (GPS) RWY 13




CHAUTAUQUA COUNTY/JAMESTOWN (JHW)

APP CRS <b>129°</b>	Rwy Idg <b>4499</b>
	TDZE <b>1723</b>
	Apt Elev <b>1723</b>

**NA** DME/DME RNP-0.3 NA. Rwy 13 Straight-in/Circling and Circling to Rwy 31 NA at night. When local altimeter setting not received, use Dunkirk altimeter setting: increase all MDAs 200 feet and visibility LNAV Cat C/D and Circling Cat C ½ SM and Circling Cat D ¾ SM. Helicopter visibility reduction below 1 SM NA.

**MISSED APPROACH:** Climb to 4000 direct GOSPL WP and hold.

AWOS-3PT <b>118.425</b>	BUFFALO APP CON ★ <b>126.05</b>	CLNC DEL <b>126.05</b>	UNICOM <b>122.7 (CTAF)</b>
----------------------------	------------------------------------	---------------------------	-------------------------------

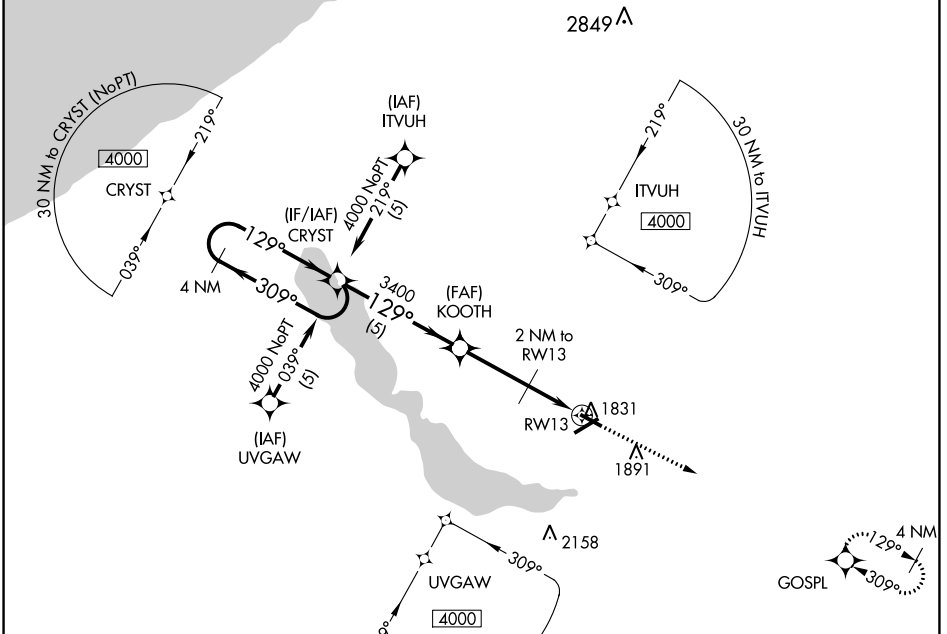

	VGS and descent angles not coincident (VGS Angle 3.00/TCH 45).		4000	GOSPL
	CRYST	KOOOTH	RWY 13	
	4 NM Holding Pattern		2 NM to RWY 13	
	4000	3400	2400	
	← 309°	129° →	3.06°	
			TCH 50	

CATEGORY	A	B	C	D
LNAV MDA	2140-1	417 (500-1)	2140-1¼	417 (500-1¼)
<b>C</b> CIRCLING	2200-1	477 (500-1)	2240-1½	2340-2
			517 (600-1½)	617 (700-2)

