WAAS CH 82008 W28A	APP CRS 280°	Rwy Idg 8003 TDZE 196 Apt Elev 201

RNAV (GPS) RWY 28

LAKE CITY GATEWAY (LCQ)

Baro-VNAV NA when using Gainesville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Gainesville altimeter setting and increase LPV DA to 624, LNAV/VNAV DA to 640 and all MDA 100 feet, increase LPV all Cats visibility ¼ mile, LNAV/VNAV all Cats visibility ⅛ mile, LNAV Cat C/D visibility ¼ mile, and Circling Cat C visibility ⅛ mile. Circling to Rwy 10 NA at night. Helicopter visibility reduction below ¾ SM not authorized.

MISSED APPROACH: Climb to 2000 direct JITUX and hold.

AWOS-3	JACKSONVILLE CENTER	LAKE CITY TOWER ★	GND CON	UNICOM
120.675	125.375 254.325	119.2 (CTAF) L 314.6	121.9	122.95

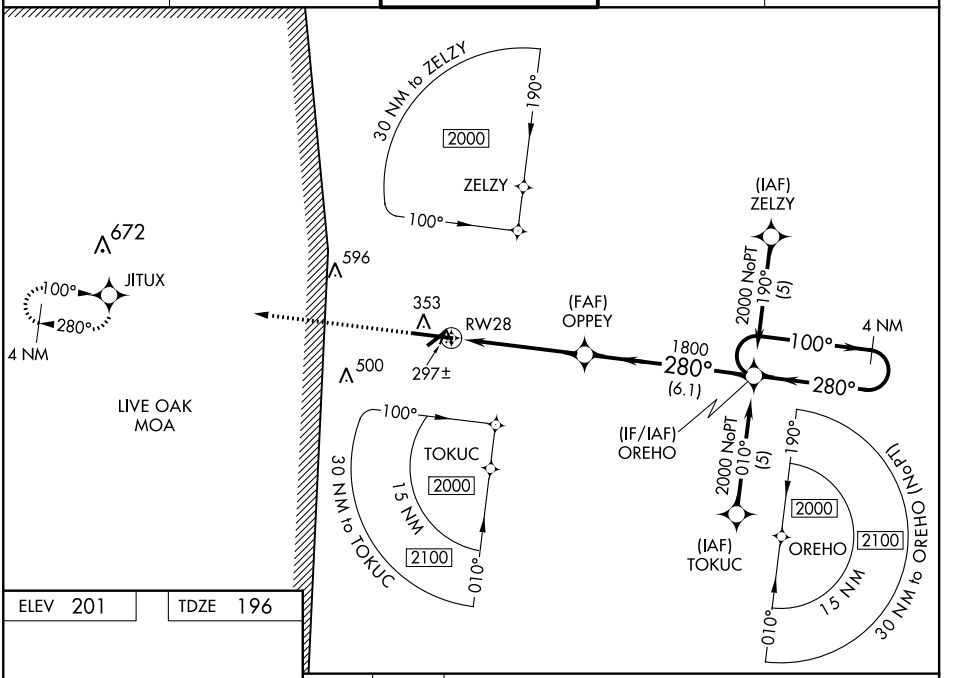

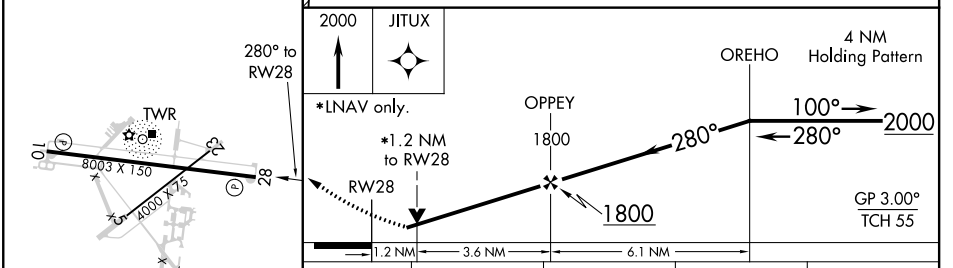

CATEGORY	A	B	C	D
LPV DA	540-1⅛ 344 (400-1⅛)			
LNAV/VNAV DA	556-1⅛ 360 (400-1⅛)			
LNAV MDA	640-1 444 (500-1)		640-1⅜ 444 (500-1⅜)	
CIRCLING	760-1 559 (600-1)		760-1½ 559 (600-1½)	760-2 559 (600-2)

REIL Rwys 10 and 28 L

MIRL Rwys 5-23 and 10-28 L

SE-3, 25 FEB 2021 to 25 MAR 2021
SE-3, 25 FEB 2021 to 25 MAR 2021