

WAAS Ch 42817 W23A	APP CRS 228°	Rwy Idg TDZE Apt Elev	5002 1013 1013
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 23

PICKENS COUNTY (L,Q,K)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Clemson altimeter setting and increase LPV DA to 1356, LNAV/VNAV DA to 1594, and all MDAs 60 feet; increase LPV all Cats visibility ¼ mile, increase LNAV and Circling Cats C and D visibility ¼ mile. Baro-VNAV NA when using Clemson altimeter setting. VDP NA with Clemson altimeter setting.

MISSED APPROACH: Climb to 3000 direct ZAKOB and hold.

AWOS-3 120.0	GREER APP CON * 118.8 270.275	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

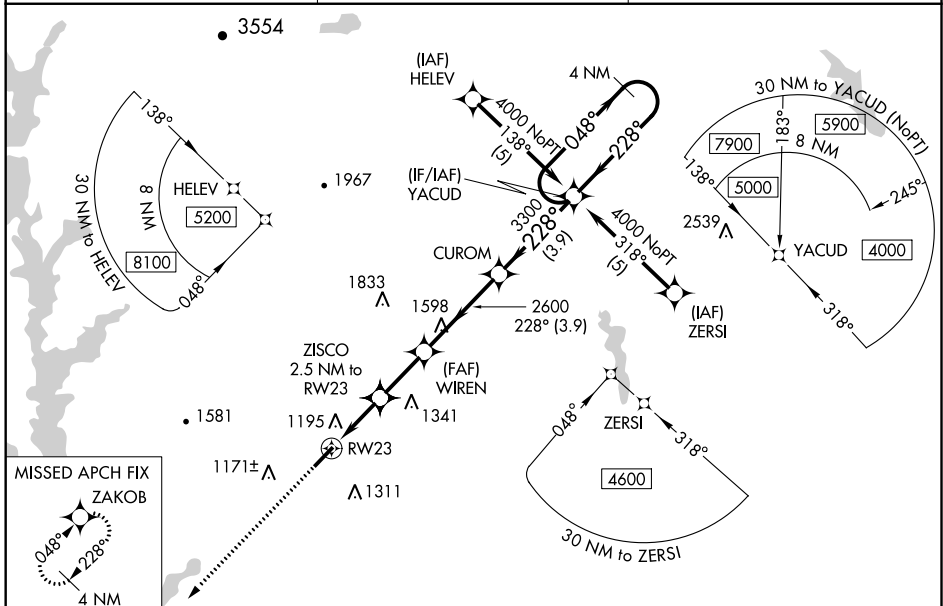

ELEV 1013	TDZE 1013
-----------	-----------

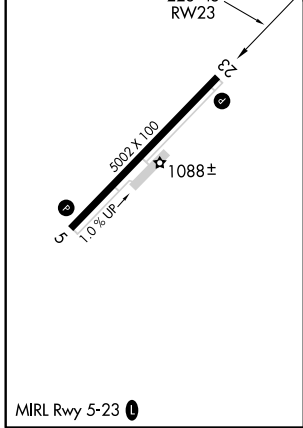

3000 ZAKOB	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 26).			
*LNAV only.	ZISCO 2.5 NM to RW23	WIREN 2600	CUROM	YACUD
	1.5 NM to RW23	1860	2600	3300
	1.5 NM	1 NM	2.3 NM	3.9 NM
CATEGORY	A	B	C	D
LPV DA	1310-1 297 (300-1)			
LNAV/VNAV DA	1548-2 535 (600-2)			
LNAV MDA	1500-1	487 (500-1)	1500-1¼ 487 (500-1½)	1500-1½ 487 (500-1½)
CIRCLING	1560-1	547 (600-1)	1560-1½ 547 (600-1½)	1660-2 647 (700-2)

SE-2, 25 FEB 2021 to 25 MAR 2021

SE-2, 25 FEB 2021 to 25 MAR 2021

MIRL Rwy 5-23 0