

# RNAV (GPS) RWY 5


PICKENS COUNTY (L,Q,K)

WAAS CH <b>99517</b> <b>W05A</b>	APP CRS <b>048°</b>	Rwy Idg <b>5002</b> TDZE <b>996</b> Apt Elev <b>1013</b>
--	------------------------	--

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Clemson altimeter setting and increase LPV DA to 1292, LNAV/VNAV DA to 1487, and all MDA 60 feet; increase LPV all Cats, LNAV and Circling Cats C and D visibility ¼ mile. Baro-VNAV NA when using Clemson altimeter setting. VDP NA with Clemson altimeter setting.

**⚠ NA** MISSED APPROACH: Climb to 4000 direct YACUD and hold.



AWOS-3 <b>120.0</b>	GREER APP CON ★ <b>118.8 270.275</b>	UNICOM <b>122.8 (CTAF) 0</b>
------------------------	---	---------------------------------

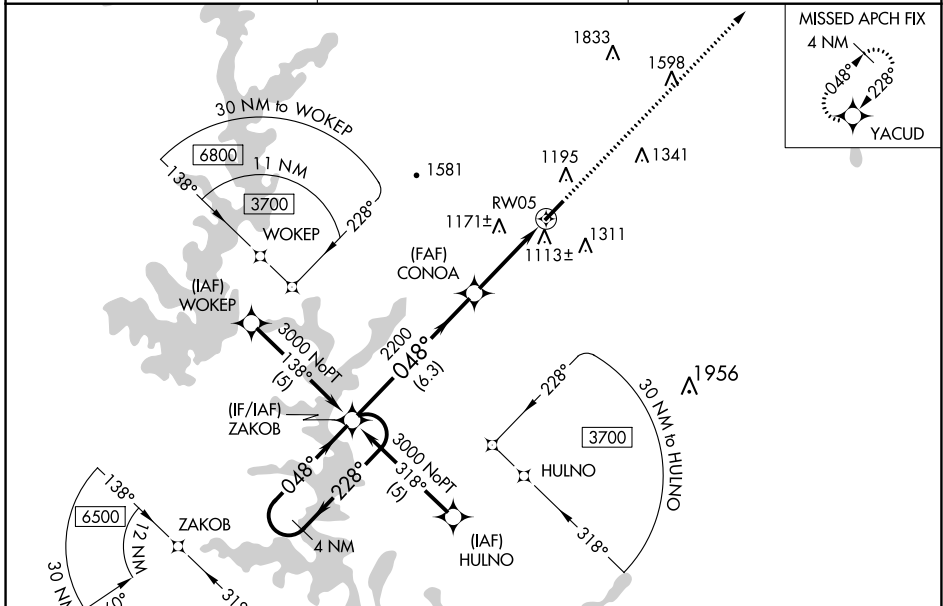

SE-2, 25 FEB 2021 to 25 MAR 2021

SE-2, 25 FEB 2021 to 25 MAR 2021

ELEV <b>1013</b>	TDZE <b>996</b>
------------------	-----------------

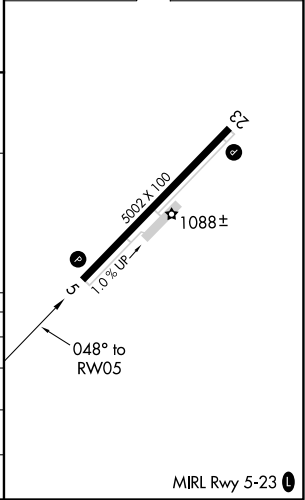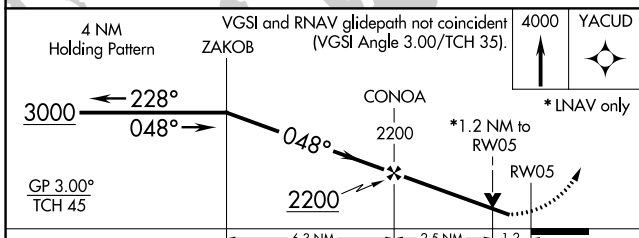

CATEGORY	A	B	C	D
LPV DA	1246-1 250 (300-1)			
LNAV/VNAV DA	1441-1¾ 445 (500-1¾)			
LNAV MDA	1380-1 384 (400-1)			1380-1¼ 384 (400-1¼)
CIRCLING	1560-1	547 (600-1)	1560-1½ 547 (600-1½)	1660-2 647 (700-2)