

| | | |
|--|------------------------|--|
| WAAS CH 69310 W10A | APP CRS 105° | Rwy Idg TDZE 8302 2869 Apt Elev 2872 |
|--|------------------------|--|


RNAV (GPS) RWY 10

MIDLAND INTL AIR AND SPACE PORT (M.A.F.)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 25°C (77°F). Circling Rwy 16L NA at night. DME/DME RNP-0.3 NA.
 ASR ** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR MISSED APPROACH: Climb to 4700 direct EASY and hold.



| | | | | | |
|------------------------------|--|--|-------------------------------|----------------------------------|-------------------------|
| ATIS 126.8 235.975 | MIDLAND APP CON* 124.6 290.4 | MIDLAND TOWER* 118.7 (CTAF) 0 273.45 | GND CON 121.9 348.6 | CLNC DEL 118.05 317.65 | UNICOM 122.95 |
|------------------------------|--|--|-------------------------------|----------------------------------|-------------------------|

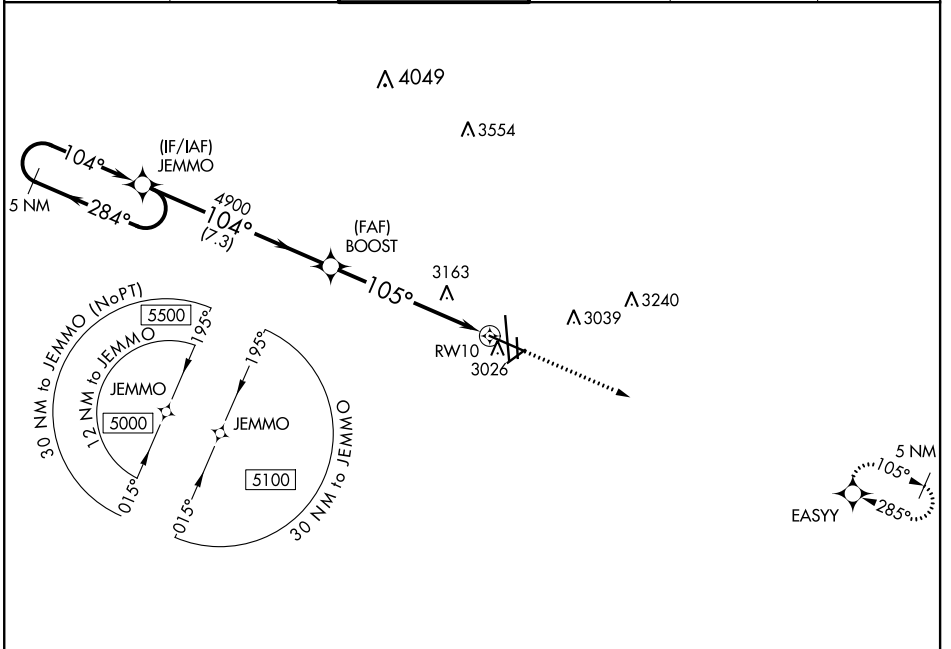

SC-3, 25 FEB 2021 to 25 MAR 2021

SC-3, 25 FEB 2021 to 25 MAR 2021

| | | |
|-----------|----------|-----------|
| ELEV 2872 | D | TDZE 2869 |
|-----------|----------|-----------|

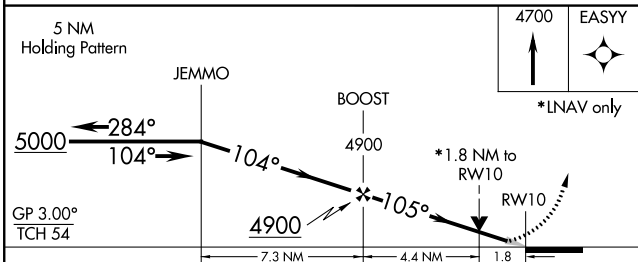

| CATEGORY | A | B | C | D |
|--------------|---------|-------------|-------------------------|-----------------------|
| LPV DA ** | 3069/24 | | 200 (200-½) | |
| LNAV/VNAV DA | 3394-1¼ | | 525 (600-1¼) | |
| LNAV MDA | 3480/24 | 611 (700-½) | 3480-1¾ | 611 (700-1¾) |
| CIRCLING | 3480-1 | 608 (700-1) | 3480-1¾ 608 (700-1¾) | 3520-2 648 (700-2) |

REIL Rwy 34L
 MIRL Rwy 4-22 and 16L-34R
 HIRL Rwy 10-28 and 16R-34L