

WAAS CH 58029 W34A	APP CRS 338°	Rwy Idg TDZE Apt Elev	3977 2801 2805
--	------------------------	-----------------------------	---




RNAV (GPS) RWY 34

MIDLAND AIRPARK (MDD)

⚠ Baro-VNAV NA when using Midland Intl Air and Space Port altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 3/4 SM NA. VDP NA with Midland Intl Air and Space Port altimeter setting. When local altimeter setting not received, use Midland Intl Air and Space Port altimeter setting and increase all DA 28 feet, all MDA 40, increase LNAV/VNAV all Cats visibility 1/8.

MISSED APPROACH:
Climb to 4500 direct ZEBIB and hold.

AWOS-3 118.125	MIDLAND APP CON * 124.6 290.4	CLNC DEL 121.8	UNICOM 122.7 (CTAF) 0
--------------------------	---	--------------------------	---------------------------------

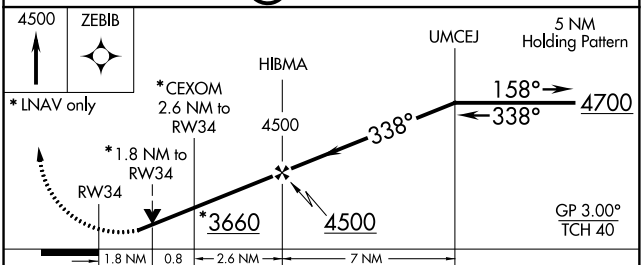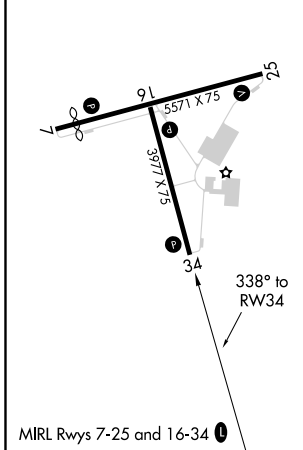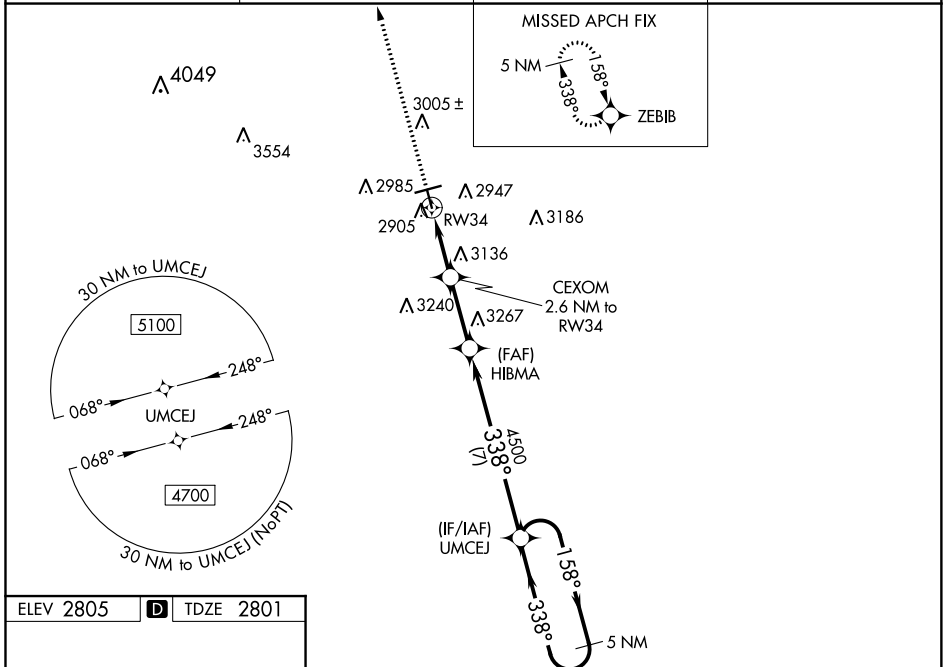

CATEGORY	A	B	C	D
LPV DA	3051-7/8	250 (300-7/8)		NA
LNAV/VNAV DA	3071-7/8	270 (300-7/8)		NA
LNAV MDA	3400-1	599 (600-1)		NA
CIRCLING	3400-1	595 (600-1)		NA

SC-3, 25 FEB 2021 to 25 MAR 2021

SC-3, 25 FEB 2021 to 25 MAR 2021