


EONNS TWO DEPARTURE(RNAV)

**TOP ALTITUDE:
5000**

D-ATIS 133.675
CLNC DEL 135.35
CPDLC
GND CON
(8L/8R/12/26L/26R) 121.8 348.6
(9/27/30) 127.5 348.6
MIAMI TOWER
118.3 256.9
MIAMI DEP CON
125.5 354.1

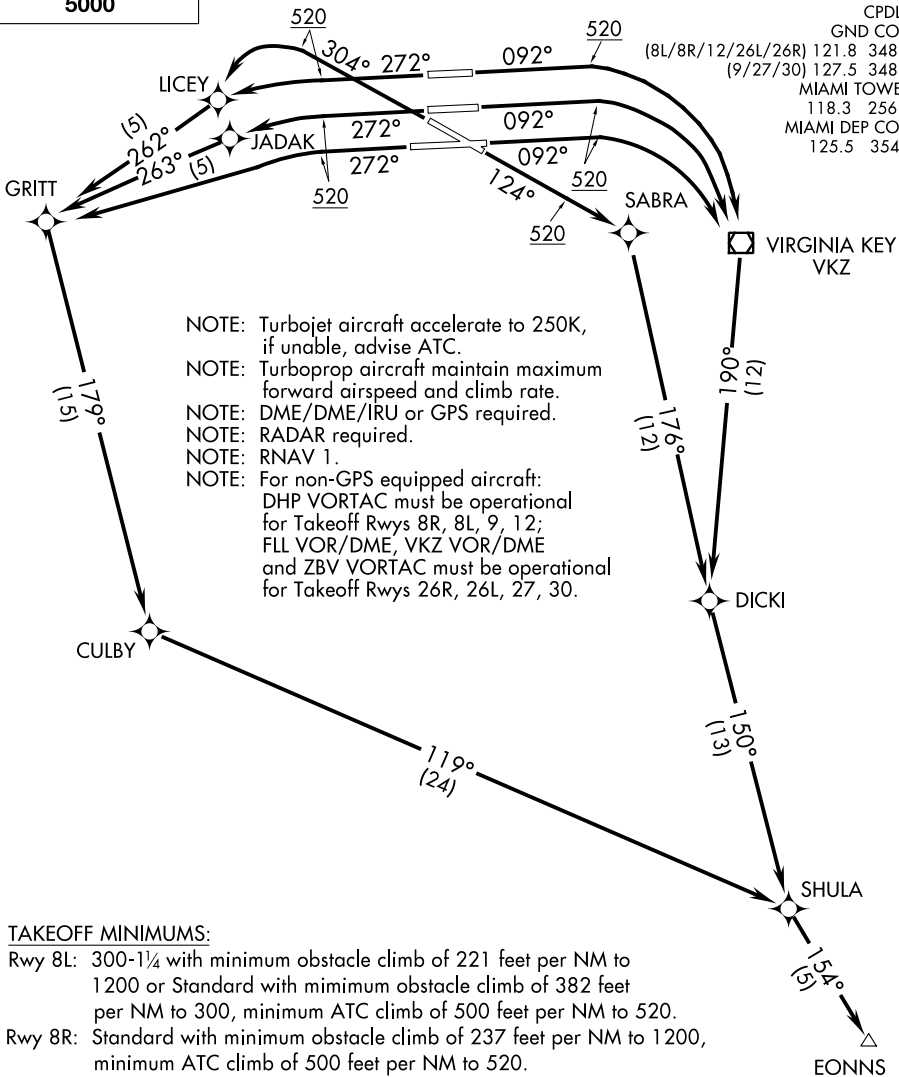

NOTE: Turbojet aircraft accelerate to 250K, if unable, advise ATC.
 NOTE: Turboprop aircraft maintain maximum forward airspeed and climb rate.
 NOTE: DME/DME/IRU or GPS required.
 NOTE: RADAR required.
 NOTE: RNAV 1.
 NOTE: For non-GPS equipped aircraft: DHP VORTAC must be operational for Takeoff Rwy's 8R, 8L, 9, 12; FLL VOR/DME, VKZ VOR/DME and ZBV VORTAC must be operational for Takeoff Rwy's 26R, 26L, 27, 30.

TAKEOFF MINIMUMS:

- Rwy 8L: 300-1¼ with minimum obstacle climb of 221 feet per NM to 1200 or Standard with minimum obstacle climb of 382 feet per NM to 300, minimum ATC climb of 500 feet per NM to 520.
- Rwy 8R: Standard with minimum obstacle climb of 237 feet per NM to 1200, minimum ATC climb of 500 feet per NM to 520.
- Rwy 9: Standard with minimum obstacle climb of 233 feet per NM to 1200, minimum ATC climb of 500 feet per NM to 520.
- Rwy 12: Standard with minimum obstacle climb of 226 feet per NM to 1200, minimum ATC climb of 500 feet per NM to 520.
- Rwys 26R, 26L, 27, 30: Standard with minimum ATC climb of 300 feet per NM to 520.

NOTE: Chart not to scale.

(NARRATIVE CONTINUED ON NEXT PAGE)

SE-3, 25 FEB 2021 to 25 MAR 2021

SE-3, 25 FEB 2021 to 25 MAR 2021