

WAAS CH <b>48915</b> <b>W36A</b>	APP CRS <b>005°</b>	Rwy Idg TDZE <b>458</b> Apt Elev <b>458</b>
--	------------------------	---


# RNAV (GPS) RWY 36

PHILADELPHIA MUNI (MPE)



**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Key Field altimeter setting and increase all DA 101 feet and all MDA 120 feet and increase LPV, LNAV/VNAV all Cats, LNAV Cats C and D visibility 1/2 mile, increase Circling Cats C and D visibility 1/4 mile. Baro-VNAV and VDP NA when using Key Field altimeter setting.

**MISSED APPROACH:**  
Climb to 3000 direct WADIS and hold.

AWOS-3P <b>118.725</b>	MEMPHIS CENTER <b>132.75 350.25</b>	UNICOM <b>123.0 (CTAF)</b>
---------------------------	--	-------------------------------

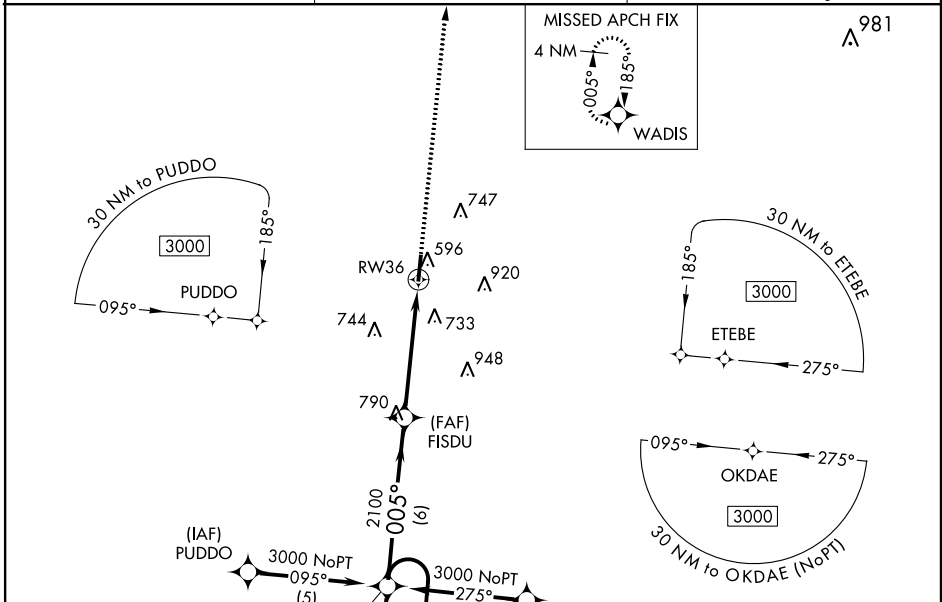

ELEV <b>458</b>	TDZE <b>458</b>
-----------------	-----------------

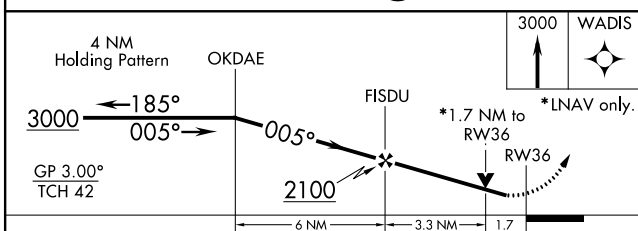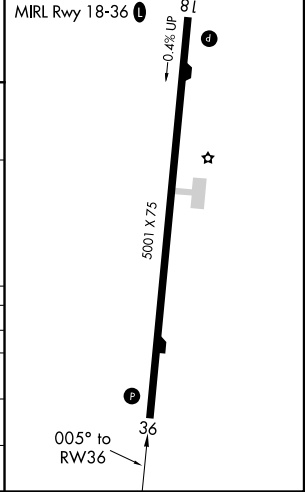

CATEGORY	A	B	C	D
LPV DA		838-1¼	380 (400-1¼)	
LNAV/VNAV DA		1107-2¼	649 (700-2¼)	
LNAV MDA	1040-1	582 (600-1)	1040-1½	1040-1¾
			582 (600-1½)	582 (600-1¾)
CIRCLING	1060-1	602 (700-1)	1060-1¾	1060-2
			602 (700-1¾)	602 (700-2)

SC-4, 25 FEB 2021 to 25 MAR 2021

SC-4, 25 FEB 2021 to 25 MAR 2021