


WAAS CH <b>61319</b> <b>W11A</b>	APP CRS <b>106°</b>	Rwy Idg TDZE Apt Elev	<b>9800</b> <b>4</b> <b>4</b>
--	------------------------	-----------------------------	-------------------------------------

# RNAV (GPS) Y RWY 11

LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)

<p><b>▼</b> For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C (31°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALSF-2, increase LNAV/VNAV all Cats visibility to RVR 4000.</p>	<p>ALSF-2</p>	<p>MISSED APPROACH: Climb to 2000 direct ZUBEL and on track 195° to SAFES and hold.</p>
---	---------------	---

D-ATIS <b>127.55</b>	NEW ORLEANS APP CON WEST <b>125.5 350.35</b> EAST <b>133.15 290.3</b>	NEW ORLEANS TOWER <b>119.5 254.3</b>	GND CON <b>121.9 273.525</b>	CLNC DEL <b>126.575</b>	CPDLC
-------------------------	---	---	---------------------------------	----------------------------	-------

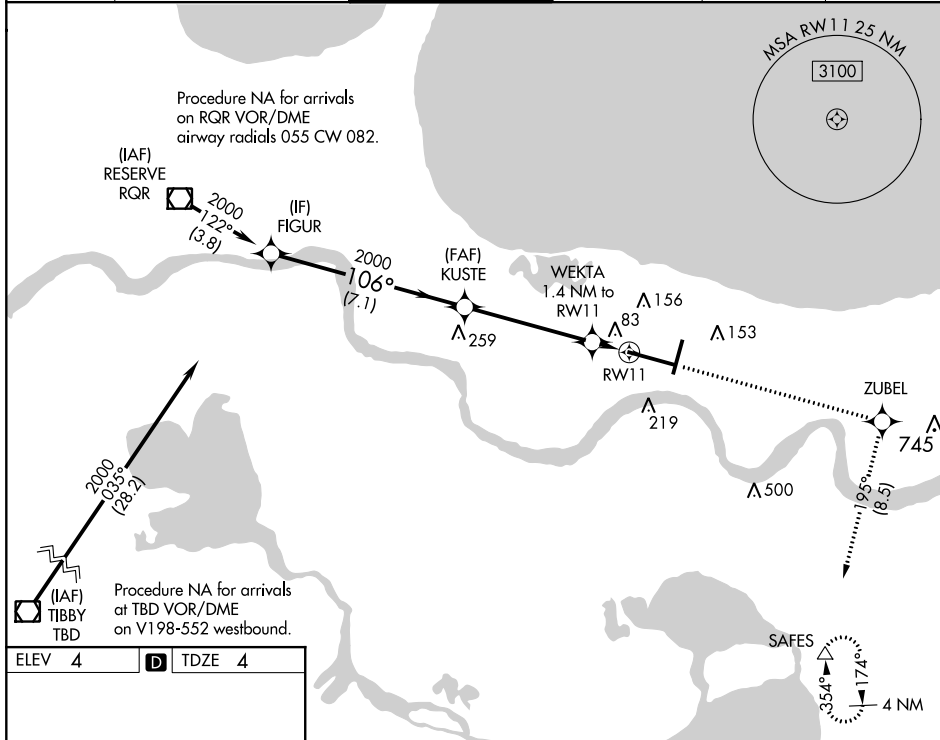

ELEV 4	<b>D</b>	TDZE 4
--------	----------	--------

