LOC/DME I-LZW	APP CRS	Rwy Idg 4099
110.5	110°	TDZE 482
Chan 42		Apt Elev 482

LOC RWY 11
OLNEY-NOBLE (OLY)

When local altimeter setting not received, use Evansville altimeter setting and increase all MDAs 140 feet, increase S-11 visibility Cat C/D ⅜ SM, Circling Cat C ¼ SM and Cat D ½ SM.
VDP NA with Evansville altimeter setting.

MISSED APPROACH: Climbing right turn to 2400 on heading 290° and on SAM VOR/DME R-313 to ALAKE INT/I-LZW LOC/DME 14.8 DME and hold.

AWOS-3	KANSAS CITY CENTER	UNICOM
119.275	124.3 269.15	123.0 (CTAF)

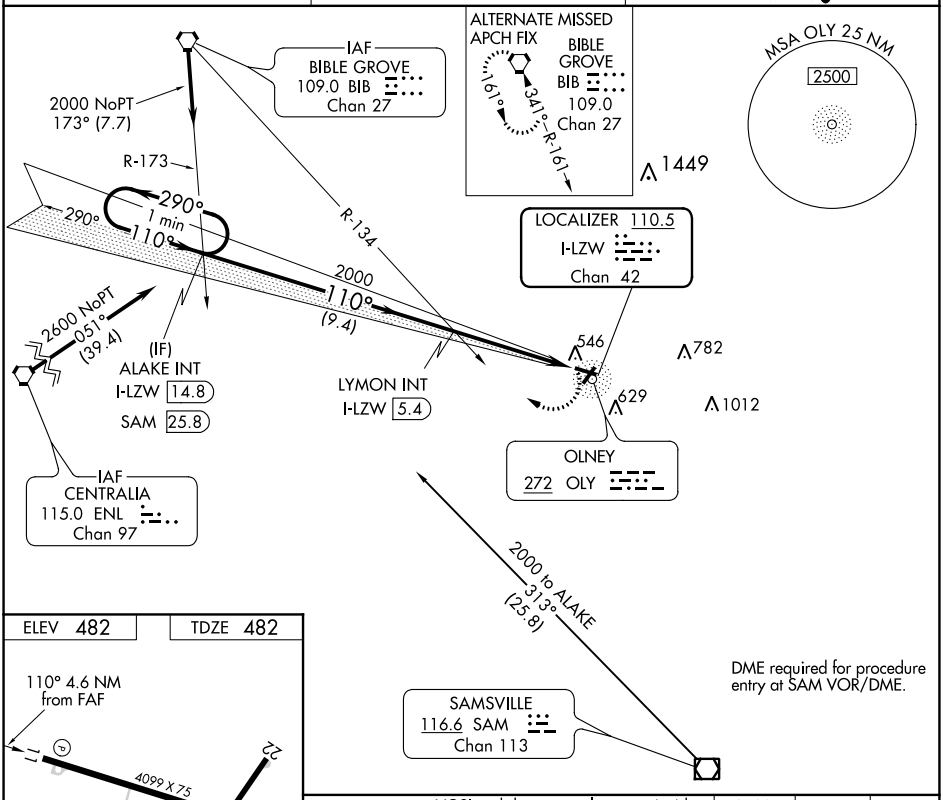

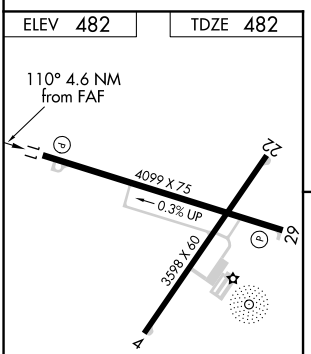

REIL Rwys 4 and 11 (L)
MIRL Rwys 4-22 and 11-29 (L)

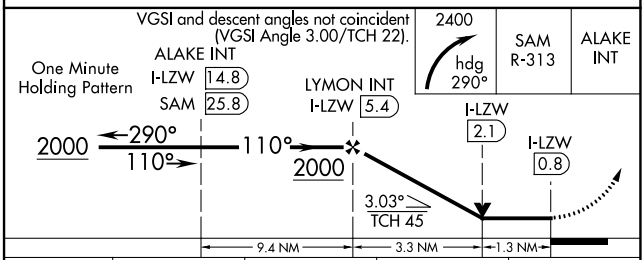

FAF to MAP 4.6 NM					
Knots	60	90	120	150	180
Min:Sec	4:36	3:04	2:18	1:50	1:32

CATEGORY	A	B	C	D
S-11	920-1	438 (500-1)	920-1¼	438 (500-1¼)
C CIRCLING	960-1	478 (500-1)	960-1½	478 (500-1½) 1180-2¼ 698 (700-2¼)

EC-3, 25 FEB 2021 to 25 MAR 2021
EC-3, 25 FEB 2021 to 25 MAR 2021