RNAV (GPS) Z RWY 27L

CHICAGO O'HARE INTL (ORD)

WAAS	APP CRS	Rwy Idg	7782
CH 77804	273°	TDZE	654
W27A		Apt Elev	680

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Simultaneous approach authorized. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALSF-2, increase LNAV Cat C/D visibility to 1⅜ mile.

ALSF-2

MISSED APPROACH: Climb to 4000 direct WASCO and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWERS	GND CON	(TWR CENTER)
135.4	119.0 292.125	128.15 348.0 (Rwy 9L/27R) 133.0 348.0 (10R/28L)	124.125 (TWR NORTH)	121.75 (OBND)
282.225		120.75 121.15 126.9 132.7 348.0 (CENTER)	118.05 (TWR SOUTH)	121.9 (IBND)
			226.675 (ALL TWRS)	

CLNC DEL 121.6 | CPDLC

RADAR REQUIRED

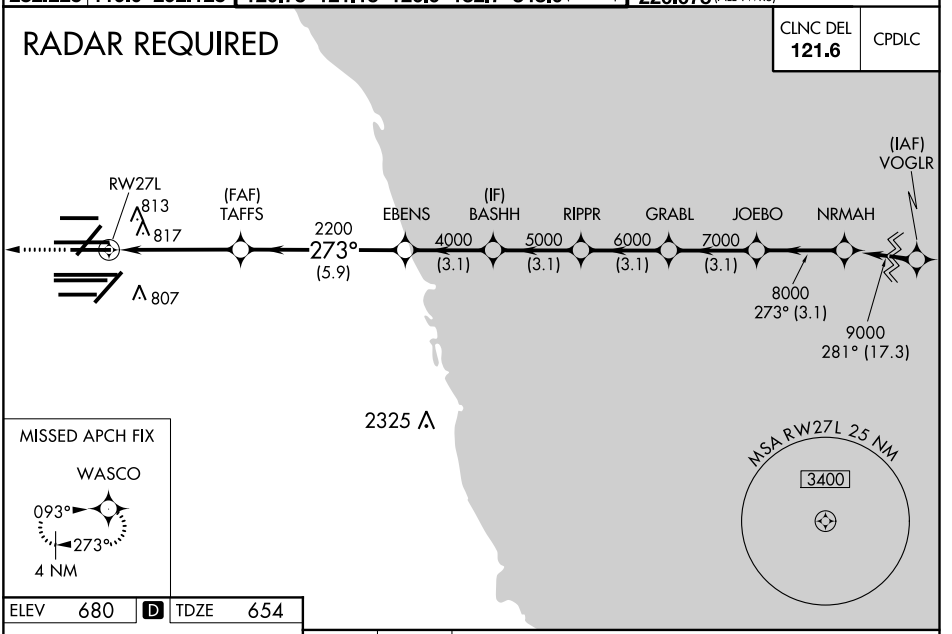

ELEV 680 | D | TDZE 654

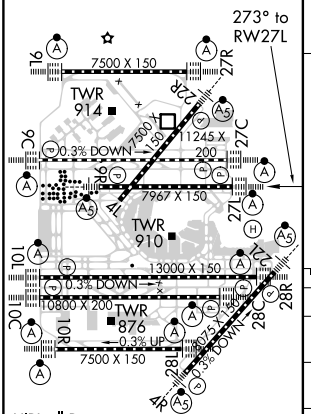

4000 | WASCO

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 67).

*LNAV only.

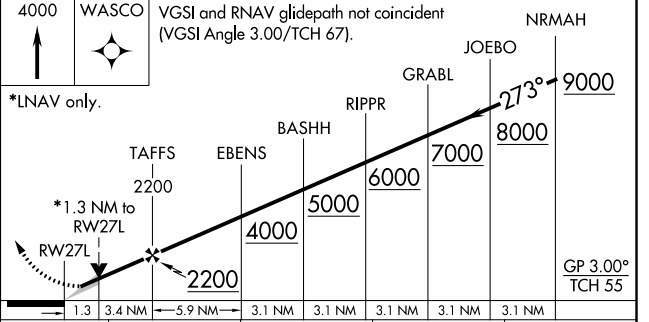

CATEGORY	A	B	C	D
LPV DA	854/18 200 (200-½)			
LNAV/VNAV DA	1125/60 471 (500-1¼)			
LNAV MDA	1120/24 466 (500-½)		1120/50 466 (500-1)	

EC-3, 25 FEB 2021 to 25 MAR 2021
EC-3, 25 FEB 2021 to 25 MAR 2021