

APP CRS	Rwy Idg	5000
333°	TDZE	999
	Apt Elev	1009

RNAV (GPS) RWY 33

WORCESTER RGNL (ORH)


RNP APCH.

- ▼ When local altimeter setting not received, use Bedford altimeter setting and increase all MDAs 200 feet and visibility LNAV Cat C/D ½ SM and visibility Circling Cat B ¼ SM. VDP NA with Bedford altimeter setting.

MISSED APPROACH:
Climbing left turn to 3000
direct GRIPE and hold.

ATIS	YANKEE APP CON	WORCESTER TOWER★	GND CON	CLNC DEL	CLNC DEL	UNICOM
126.55	119.0 327.1	120.5 (CTAF) 263.0	123.85	128.65	119.0 (When twr closed)	122.95


Procedure NA for arrival on GDM VOR/DME airway radials 071 CW 209.

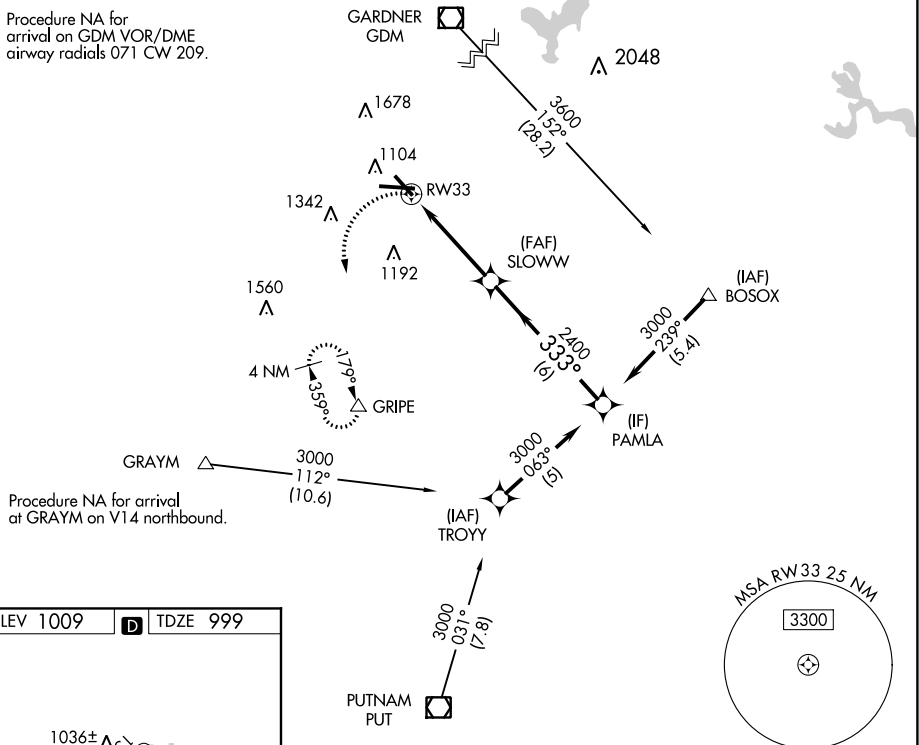

NE-1, 25 FEB 2021 to 25 MAR 2021

NE-1, 25 FEB 2021 to 25 MAR 2021

ELEV 1009	D	TDZE 999
-----------	----------	----------

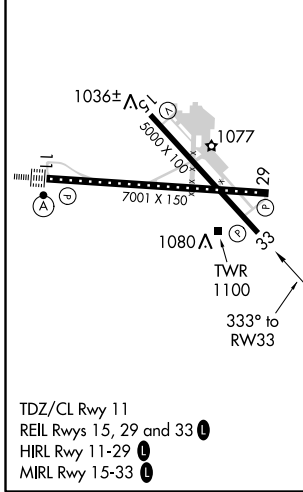

3000	GRIPE	Procedure Turn NA		
CATEGORY	A	B	C	D
LNAV MDA	1480-1	482 (500-1)	1480 -1 3/8	482 (500-1 1/8)
C CIRCLING	1560-1 551 (600-1)	1720-1 711 (800-1)	2000-3 991 (1000-3)	