VOR RWY 9

WITTMAN RGNL (OSH)

VORTAC OSH	APP CRS	Rwy Idg	5648
116.75	090°	TDZE	797
Chan 114 (Y)		Apt Elev	808

Circling to Rwy 5, 23, and 31 NA at night. When local altimeter setting not received, use Fond Du Lac altimeter setting and increase all MDA 40 feet and increase S-9 Cats C and D visibility and Circling Cat C visibility ⅛ mile and Circling Cat D visibility ¼ mile, increase CETOL fix minimums Circling Cat D visibility ¼ mile. VDP NA with Fond Du Lac altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3000 on OSH VORTAC R-111 to LEWKO INT/OSH 15.1 DME and hold.

ATIS	MILWAUKEE APP CON	OSHKOSH TOWER ★	GND CON	UNICOM
125.9	127.0 263.075	118.5 (CTAF) L 290.9	132.3	122.95

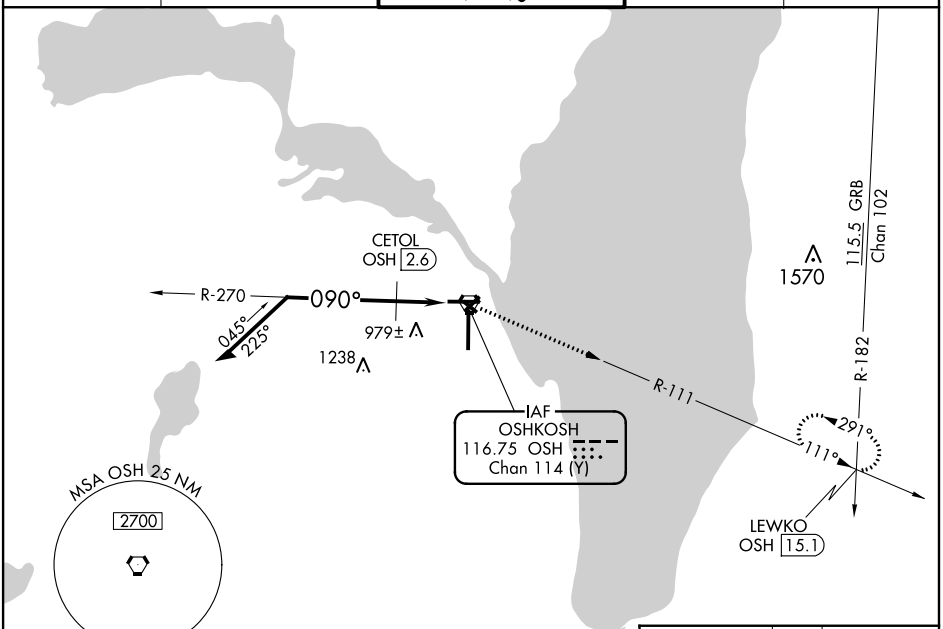

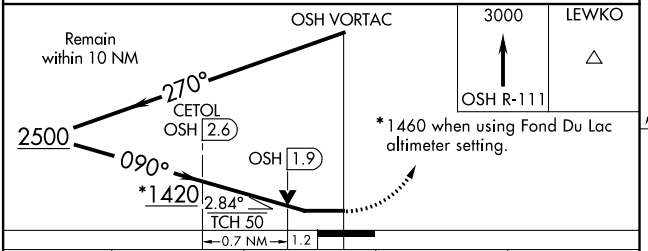

CATEGORY	A	B	C	D
S-9	1420-1	623 (700-1)	1420-1¾	623 (700-1¾)
C CIRCLING	1420-1	612 (700-1)	1420-1¾ 612 (700-1¾)	1440-2 632 (700-2)
CETOL FIX MINIMUMS				
S-9	1240-1	443 (500-1)	1240-1⅜	443 (500-1⅜)
C CIRCLING	1280-1 472 (500-1)	1300-1 492 (500-1)	1360-1½ 552 (600-1½)	1440-2 632 (700-2)

ELEV 808 D TDZE 797

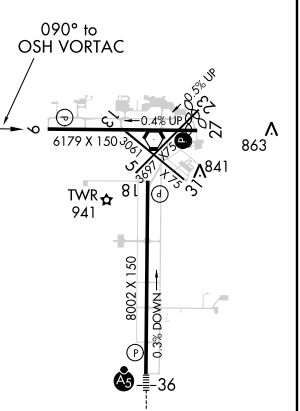

REIL Rwys 18 and 27
HIRL Rwys 9-27 and 18-36 L

EC-3, 25 FEB 2021 to 25 MAR 2021
EC-3, 25 FEB 2021 to 25 MAR 2021