


LOC/DME I-PHX <b>111.5</b> Chan <b>52</b>	APP CRS <b>078°</b>	Rwy Idg <b>10300</b> TDZE <b>1116</b> Apt Elev <b>1135</b>
---	------------------------	--

# ILS or LOC/DME RWY 7L



PHOENIX SKY HARBOR INTL (PHX)

<p><b>▽</b> For inoperative ALS, increase S-LOC 7L Cats C/D visibility to RVR 5500.</p> <p><b>▲</b> MALSR</p>	<p>PHOENIX TOWER <b>118.7 278.8</b> (Rwy 8-26) <b>120.9 254.3</b> (Rwy 7L-25R, 7R-25L)</p>		<p>GND CON <b>119.75 269.2</b> (N) <b>132.55 269.2</b> (S)</p>	<p>CLNC DEL <b>118.1 269.2</b></p>	<p>CPDLC</p>
	<p>D-ATIS <b>127.575</b></p>	<p>PHOENIX APP CON <b>128.65 353.9</b></p>			

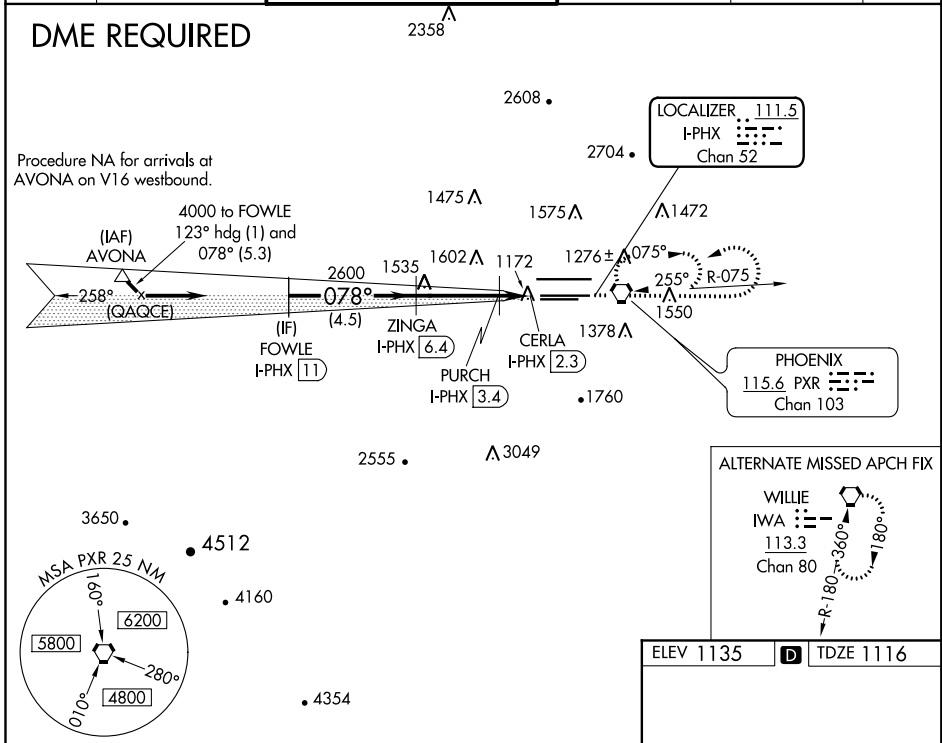

SW-4, 25 FEB 2021 to 25 MAR 2021

SW-4, 25 FEB 2021 to 25 MAR 2021

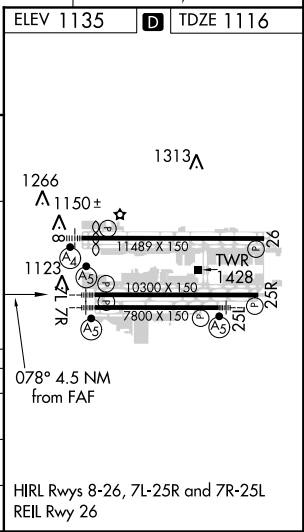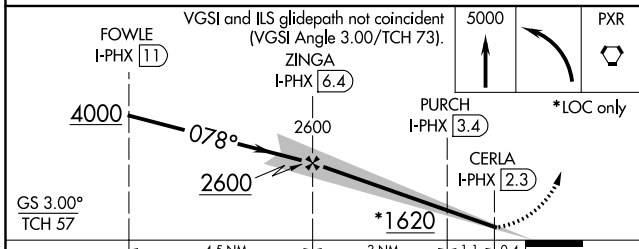

CATEGORY	A	B	C	D
S-ILS 7L	1326/24 210 (200-½)			
S-LOC 7L	1460/24 344 (400-½)		1460/30 344 (400-¾)	
CIRCLING	1740-1 605 (700-1)		2040-2¾ 905 (1000-2¾)	2560-3 1425 (1500-3)