

WAAS CH 77509 W31A	APP CRS 309°	Rwy Idg 10104 TDZE 650 Apt Elev 661
--	------------------------	--

RNAV (GPS) RWY 31

GENERAL DOWNING-PEORIA INTL (PIA)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.
 For inoperative MALS, increase LPV all Cats visibility to 4500. When local altimeter setting not received, use Logan County altimeter setting and increase all DA 89 feet and all MDA 100 feet, increase LPV DA all Cats visibility to RVR 3500, LNAV/VNAV DA all Cats visibility to 1 1/4 mile, LNAV MDA Cat C and D visibility to RVR 5000, and Circling Cat C 1/4 mile and Cat D 1/2 mile. Baro-VNAV and VDP NA when using Logan County altimeter setting. Circling Rwy 13, 31 NA at night.



MALS

MISSED APPROACH:
Climb to 2500 direct FAPSA and hold.

ATIS 126.1 282.2	PEORIA APP CON (305°-125°) 125.8 269.2	PEORIA TOWER 124.0 353.85	GND CON 121.85 348.6
----------------------------	--	-------------------------------------	--------------------------------

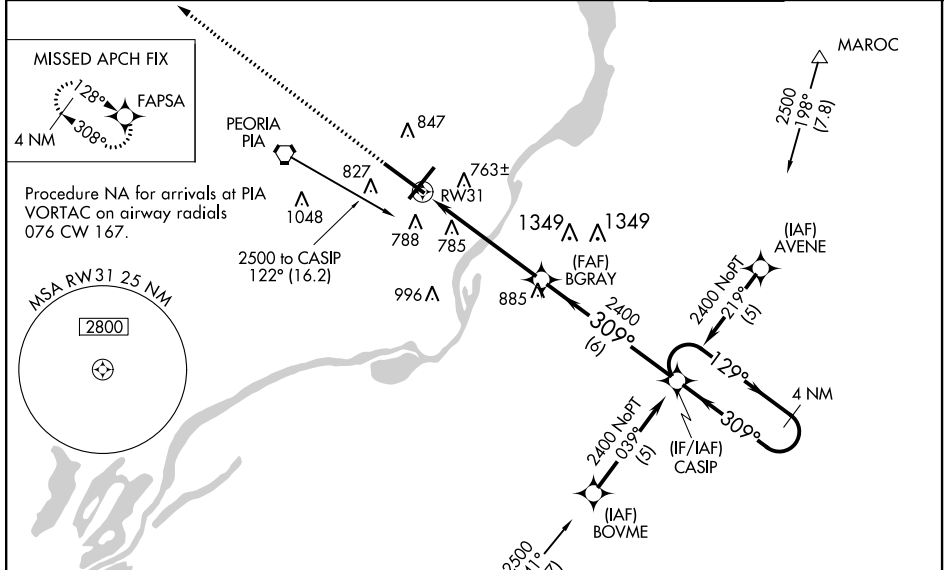

ELEV 661	D	TDZE 650
----------	----------	----------

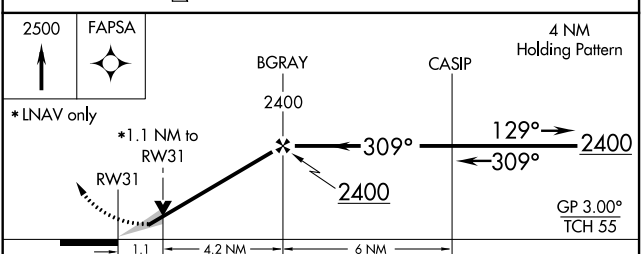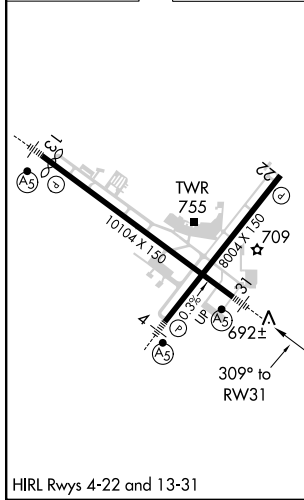

CATEGORY	A	B	C	D
LPV DA	939/24		289 (300-1/2)	
LNAV/VNAV DA	1122/60		472 (500-1 1/4)	
LNAV MDA	1040/24	390 (400-1/2)	1040/35	390 (400-5/8)
C CIRCLING	1160-1	499 (500-1)	1180-1 1/2 519 (600-1 1/2)	1400-2 1/4 739 (800-2 1/4)

EC-3, 25 FEB 2021 to 25 MAR 2021

EC-3, 25 FEB 2021 to 25 MAR 2021