

WAAS CH <b>86708</b> <b>W06A</b>	APP CRS <b>060°</b>	Rwy Idg TDZE Apt Elev	<b>5000</b> <b>657</b> <b>666</b>
--	------------------------	-----------------------------	---




# RNAV (GPS) RWY 6

PONTIAC MUNI (PNT)

**⚠** DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Bloomington/Normal altimeter setting. When local altimeter setting not received, use Bloomington/Normal altimeter setting and increase LPV DA to 1138, LNAV/VNAV DA to 1339 and all MDA 100 feet, increase LPV visibility ½ mile all Cats, LNAV/VNAV 1 mile all Cats, Circling Cat C ½ mile. Visibility reduction by helicopters NA.

**MISSED APPROACH:** Climb to 3000 direct KEJDO and hold.

AWOS-3 <b>119.675</b>	CHICAGO CENTER <b>123.75 259.1</b>	UNICOM <b>123.075 (CTAF) 0</b>
--------------------------	---------------------------------------	-----------------------------------

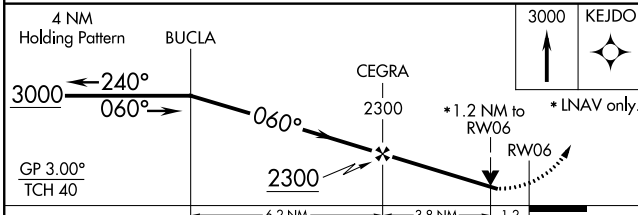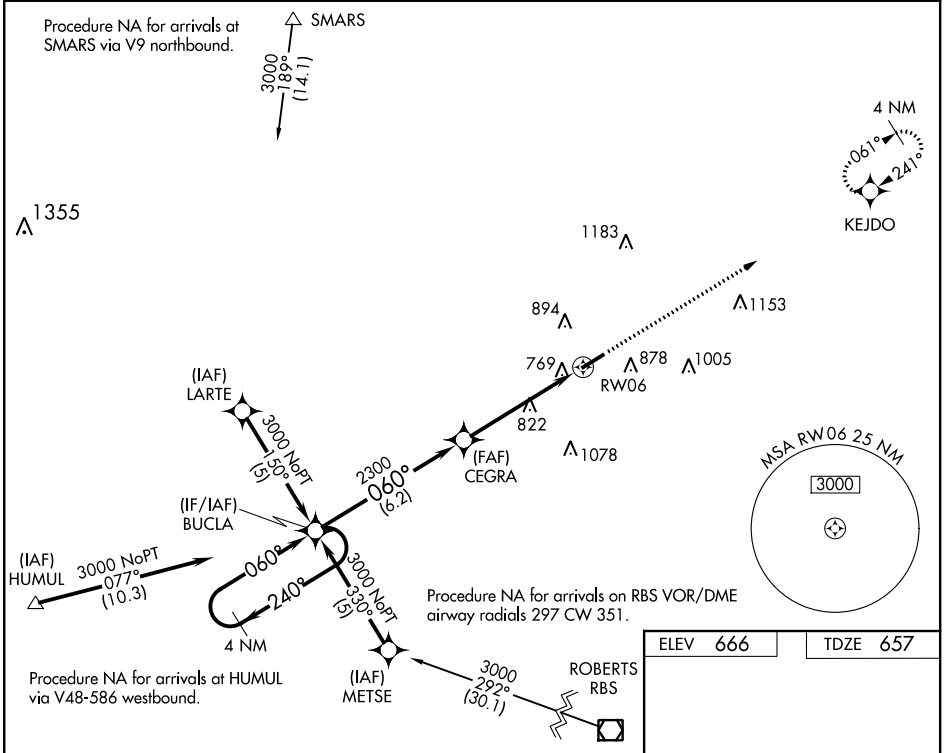

CATEGORY	A	B	C	D
LPV DA	1040-1½	383 (400-1½)		NA
LNAV/VNAV DA	1071-1½	414 (500-1½)		NA
LNAV MDA	1080-1	423 (500-1)	1080-1¼ 423 (500-1¼)	NA
CIRCLING	1180-1	514 (600-1)	1200-1½ 534 (600-1½)	NA

ELEV 666	TDZE 657
----------	----------

MIRL Rwy 6-24 0

EC-3, 25 FEB 2021 to 25 MAR 2021

EC-3, 25 FEB 2021 to 25 MAR 2021