

RNAV (RNP) Z RWY 35R

LOUISVILLE MUHAMMAD ALI INTL (SDF)

APP CRS	Rwy Idg	7800
350°	TDZE	480
	Apt Elev	501





RNP AR APCH.

▼ For uncompensated Baro-VNAV systems, procedure NA below -14°C or above 54°C. For inop ALS, increase RNP 0.12 all Cats visibility to RVR 5000 and RNP 0.30 all Cats visibility to 1¼ SM. Simultaneous approach authorized, except for arrivals at DIGRR, TUPAY, and STUGZ.

ALSF-2

Ⓜ MISSED APPROACH: Climb to 1600 then climbing right turn to 4000 direct TORAC and hold.

D-ATIS	LOUISVILLE APP CON	LOUISVILLE TOWER	GND CON	CLNC DEL	CPDLC
118.725	132.075 327.0	124.2 257.8	121.7 348.6	126.1 275.8	

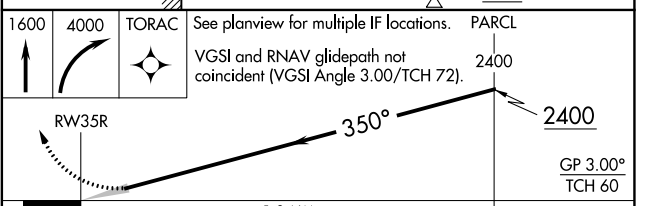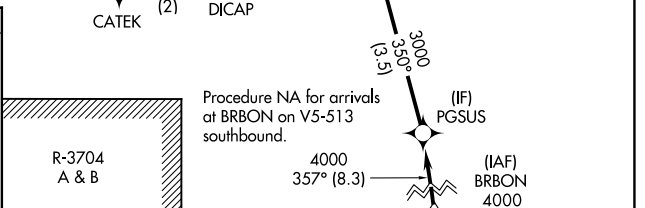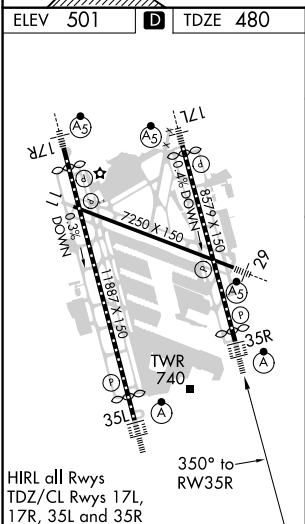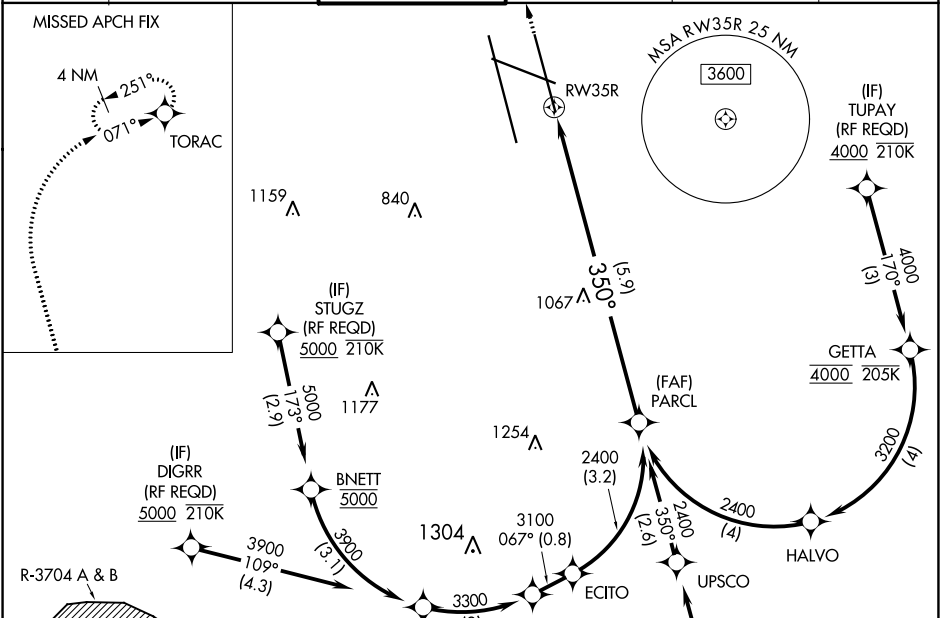

CATEGORY	A	B	C	D
RNP 0.12 DA		795/26	315 (300-½)	
RNP 0.30 DA		951/55	471 (500-1)	

AUTHORIZATION REQUIRED

SE-1, 25 FEB 2021 to 25 MAR 2021

SE-1, 25 FEB 2021 to 25 MAR 2021