VORTAC SPI	APP CRS	Rwy Idg	7000
112.7	296°	TDZE	590
Chan 74		Apt Elev	598

VOR/DME RWY 31

ABRAHAM LINCOLN CAPITAL (SPI)

T A ASR — When local altimeter setting not received, use Lincoln altimeter setting and increase all MDA 60 feet; increase S-31 Cat C/D visibility ⅛ mile and Circling Cat C/D visibility ¼ mile. For inoperative MALSR, increase S-31 Cat C/D visibility to 1¾ mile. When using Lincoln altimeter setting increase S-31 Cat C/D visibility to 1⅞ mile. VDP NA with Lincoln altimeter setting.

MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 2500 on SPI VORTAC R-314 to ULAXY/SPI 11.6 DME and hold.

ATIS	SPRINGFIELD APP CON ★	SPRINGFIELD TOWER ★	GND CON	CLNC DEL	UNICOM
127.65 270.1	126.15 323.0	121.3 (CTAF) L 257.8	121.9 348.6	121.7	122.95

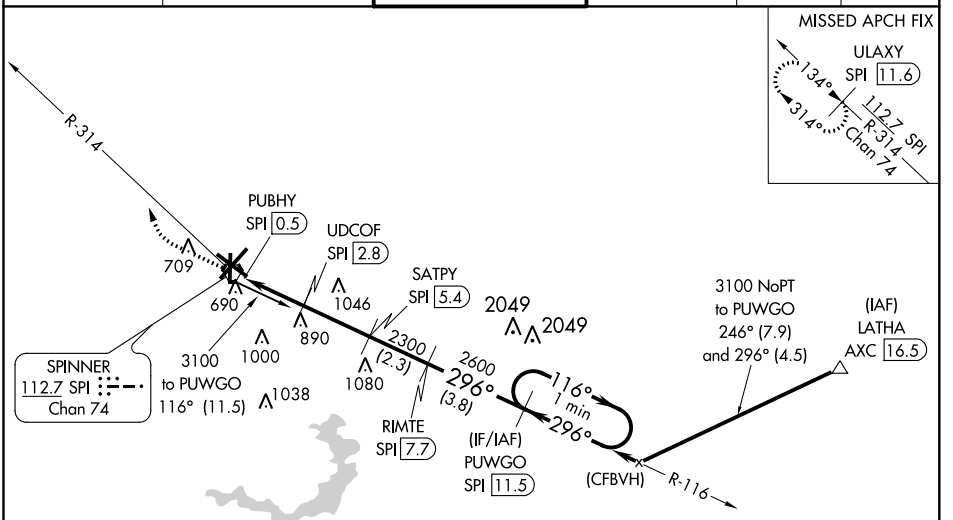



ELEV 598 D TDZE 590



296° 4.9 NM from FAF

MIRL Rwy 18-36
REIL Rwy 13 L
HIRL Rwys 4-22 and 13-31 L

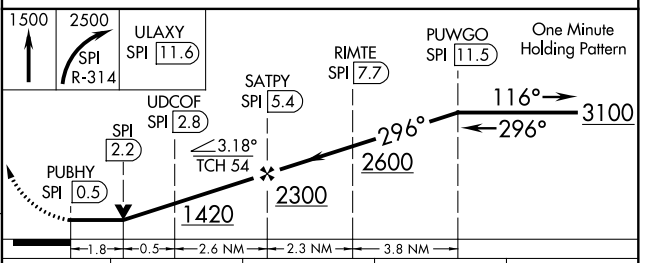

CATEGORY	A	B	C	D
S-31	1200-½ 610 (700-½)		1200-1⅜ 610 (700-1⅜)	
C CIRCLING	1200-1 602 (700-1)		1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)

EC-3, 25 FEB 2021 to 25 MAR 2021
EC-3, 25 FEB 2021 to 25 MAR 2021