LOC/DME I-LDZ	APP CRS	Rwy Idg	9003
108.9	123°	TDZE	541
Chan 26		Apt Elev	618

ILS or LOC RWY 12L

ST LOUIS LAMBERT INTL (STL)

Disregard OM indications. For inop ALS, increase S-ILS 12L Cat E visibility to RVR 4000 and S-LOC 12L Cat E visibility to 1½ SM. Simultaneous approach authorized with Rwy 11. Simultaneous approach authorized with Rwy 12R requires use of vertical guidance; maintain last altitude until established on the glideslope.

ALSF-2

MISSED APPROACH: Climb to 2500 then climbing left turn to 3000 direct TOY VORTAC and hold.

D-ATIS	ST. LOUIS APP CON	ST. LOUIS TOWER	GND CON	CLNC DEL	CPDLC
125.025 379.925	132.125 360.6	120.05 284.6	121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	119.5 363.1	

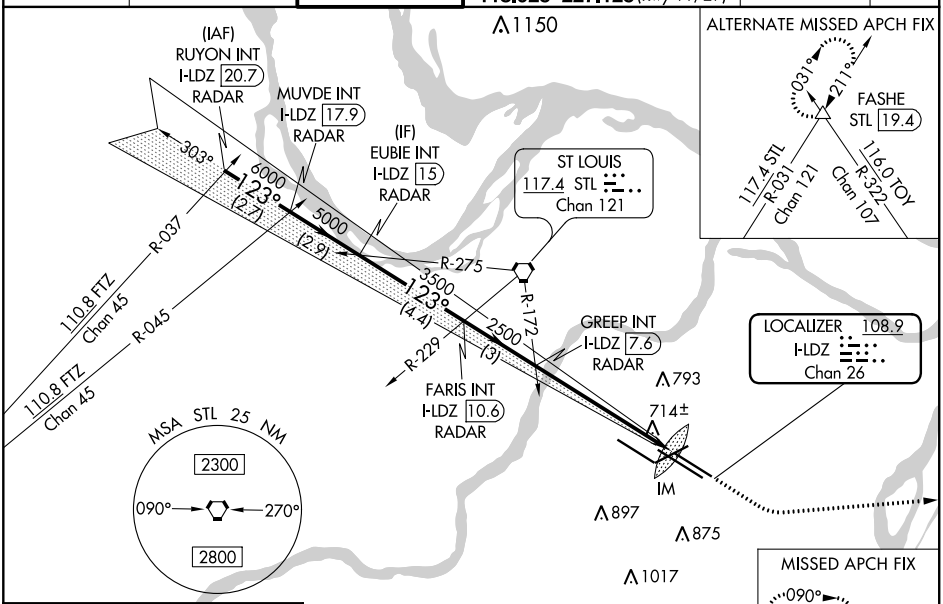

ELEV 618 | D | TDZE 541

RADAR and DME REQUIRED



HIRL all Rwys
TDZ/CL Rwys 11, 12L, 12R, 29, and 30R

FAF to MAP 5.9 NM					
Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

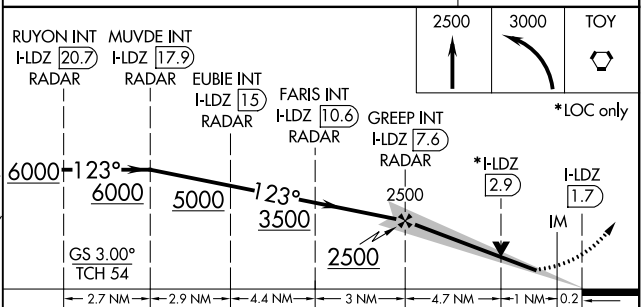

CATEGORY	A	B	C	D	E
S-ILS 12L	741/18 200 (200-½)				741/24 200 (200-½)
S-LOC 12L	980/24 439 (400-½)		980/40 439 (400-¾)	980/50 439 (400-1)	

NC-3, 25 FEB 2021 to 25 MAR 2021
NC-3, 25 FEB 2021 to 25 MAR 2021