WAAS CH 42819 W23A	APP CRS 234°	Rwy Idg 5997 TDZE 29 Apt Elev 31

RNAV (GPS) RWY 23
GRAND STRAND (CRE)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA with Myrtle Beach Intl altimeter setting. When local altimeter setting not received use Myrtle Beach Intl altimeter setting and increase all DA 31 feet and all MDA 40 feet; increase LNAV/VNAV all Cats and LNAV Cat C and D visibility ⅛ mile. For inop MALSR when using Myrtle Beach Intl altimeter setting, increase LNAV Cats C and D visibility to 1⅜.

MALSR

MISSED APPROACH: Climb to 1000 then climbing right turn to 2000 direct OTCEN and hold.

ATIS	MYRTLE BEACH APP CON★	STRAND TOWER★	GND CON	UNICOM
119.625	119.2 350.3	124.6 (CTAF) L 257.6	121.8 257.6	122.95

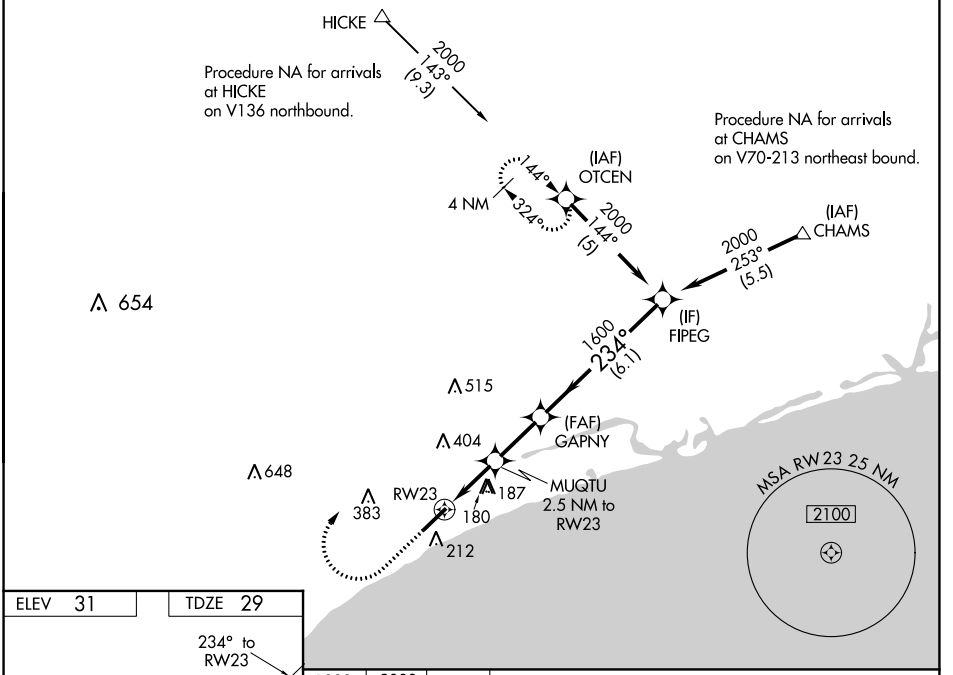

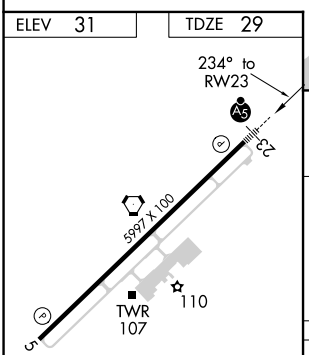

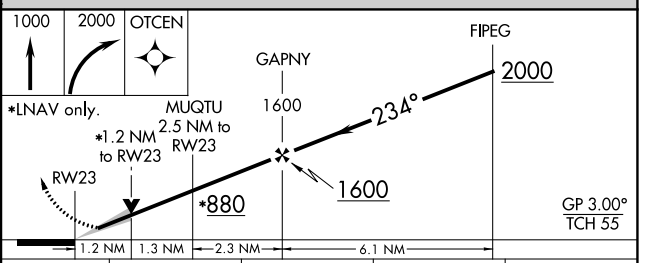

CATEGORY	A	B	C	D
LPV DA	229-½	200 (200-½)		
LNAV/VNAV DA	411-¾	382 (400-¾)		
LNAV MDA	480-½	451 (500-½)	480-⅞	451 (500-⅞)
CIRCLING	520-1	489 (500-1)	520-1½	489 (500-1½)
			720-2¼	689 (700-2¼)

REIL Rwy 5 L
HIRL Rwy 5-23 L

SE-2, 25 FEB 2021 to 25 MAR 2021
SE-2, 25 FEB 2021 to 25 MAR 2021